




The Eagle Eye Camera DZ03 is a high performance 5 Mega Pixel PTZ that incorporates all the features necessary to get clarity under both day and night conditions. The durable aluminum housing is easy to mount. The camera comes pre-configured to securely operate with the Eagle Eye Cloud Security VMS. No configuration is needed. Just connect and start recording video. Best for small outdoor or any size indoor area.

Key Features

- > 5 Mega Pixel
- > Indoor/Outdoor Weatherproof Dome
- > Durable All Aluminum Housing
- > Motorized Lens 4.7-56.4mm zoom and focus
- > Wide Dynamic Range
- > Night Vision Smart IR, Up to 80m Range
- > Triple RTSP Streams

Dimension Drawing

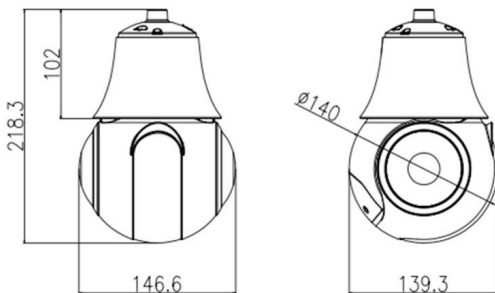

Eagle Eye Part Numbers

EN-CDUZ-003a	Eagle Eye Camera DZ03 Indoor/Outdoor Dome 5Mpix, IR, IP66, 4.7mm-56.4mm Moto lens, POE+
EN-CAWA-003	Eagle Eye Camera Wall Arm WA003 (DZ03)
EN-CAPE-002	Eagle Eye Camera Pendant PE002 (DZ03)
EN-CABX-004	Eagle Eye Camera Junction Box BX004 (WA03,PE02,DF03)
EN-RRCO2	Eagle Eye Camera+ Rapid Replacement

Camera

Pixels	5 Mega Pixel
Resolutions	2560×1920/2048×1536/1280×960 @25/30fps, D1/VGA/640×360/CIF/QVGA @25/30fps, VGA/CIF/QVGA @25/30fps
Lens	4.7-56.4mm motorized lens
Night Vision	Up to 80m
Field of View	60.9 deg to 6.43 deg
Dynamic Range	Wide Dynamic Range (120dB)
Digital Noise Reduction	Yes, with Defog capability
Digital Image Stabilization	Automatic
Applications	Best for Indoor/Outdoor deployments that require a medium level of zoom capabilities
Image Sensor	1/2.8" progressive scan CMOS
Iris	Fixed
Shutter Speed	1/5s to 1/20000s
Min Illumination	Color 0.01Lux; IR ON 0 Lux

Digital Capabilities

Video Compression	H.264/265 high/main/baseline, MJPEG
Audio Compression	G.711, RAW_PCM
Image Settings	Rotation, Saturation, Brightness, Contrast, Sharpness
Corridor mode	N/A

Setup

Eagle Eye Cloud VMS	Preconfigured with secure password, plug and play
Camera Settings	Fully Integrated with Eagle Eye Cloud VMS
Cyber Secure	Eagle Eye Verified

Interface

Ethernet	Waterproof RJ-45 Female 10/100 Base-T
Audio	1Ch audio in, 1Ch audio out
BNC output	N/A
Edge Storage	Micro SD/SDHC/SDXC slot, Max 64GB

Physical/Power

Power	AC24V/POE+, Power Supply Included
Power Consumption	Less than 25W
Operating Temperature	-40°C to +60°C
Operating Humidity	0% - 90% RH
Waterproof	IP66
Approvals	CE/FCC
Dimensions	Φ130×112mm
Weight	1.5Kg
Housing	Aluminum and Composite