


- Ideal proximity reader for applications where crime and vandalism are expected
- Solid stainless steel bezel with Fibertex® insert provides the highest level of vandal resistance
- Fibertex® material is UL752 listed for bulletproof integrity
- May be used on non-Keyscan systems with many HID 125kHz card protocols
- Pass-thru Wiegand output standard
- Suitable for outdoor applications in all weather conditions
- Provides non-contact read range of up to 25mm (1 inch)
- Limited lifetime warranty against defects in materials and workmanship



### FEATURES AND BENEFITS

- Stylish yet extremely robust for the toughest applications
- Uses proven digital radio frequency identification technology
- Ideal proximity reader where vandalism is a concern
- Designed for indoor and outdoor environments
- Pass-thru Wiegand output for easy integration into existing access control systems
- Mounting options include two countersunk 0.25 inch thru-holes as well as four 1/4-20 tapped holes in the back for tamper-proof blind mount installations.

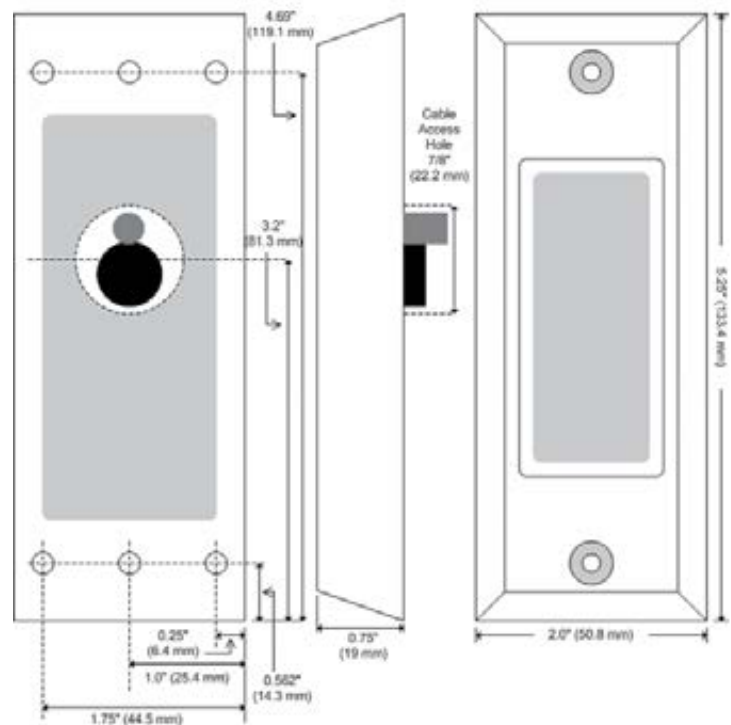

### SPECIFICATIONS

- Size: 5.25 x 2 x 0.75 inches (134 x 51 x 19mm)  
Read Range: Up to 1 Inch (25mm)  
Input Voltage: 12 VDC at reader  
Typical Current Draw: 90mA "(  
Cable Termination: 6 conductor shielded 12" Pigtail standard  
Wiegand Output: 500 feet (152 meters)  
Operating Temp: -40°C to 65°C (-40°F to 149°F)