


# Mini Network Camera

## Quick Installation Guide

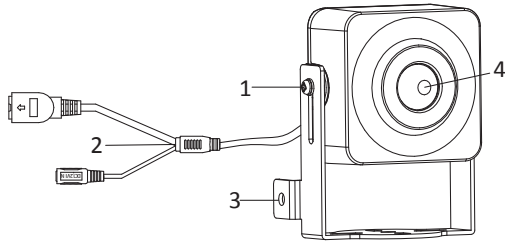


Overview of Type I Mini Camera


No.	Description
1	Tilt Adjust Screw
2	Power Cable (12 VDC) and Network Cable
3	Tieline Buckle
4	Lens
5	Bracket Power
6	Complex Cable Serial Interface
7	Reset Button

### Note:


Press RESET about 10s when the camera is power on or rebooting to restore the default settings, including the user name, password, IP address, port No., etc.. You are required to activate the camera after restoring.

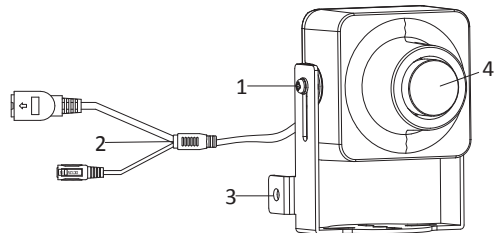

Overview of Type II Mini Camera

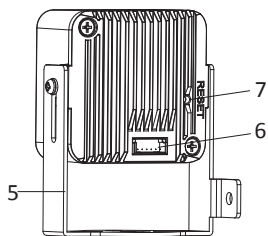

Overview of Type I & II Mini Camera




### Installation Steps:

The installation steps for the Type I and the Type II mini cameras are same. The installation of the Type I is taken as the example in the following instruction.

#### 1. Fix the camera to the mounting surface with screws.

#### 2. Adjust the camera position:

- 1). If you use No.1 screw hole to secure the camera, you can slightly loosen the screw to adjust the camera to right or left.
- 2). If you use No.2 screw hole to secure the camera, you can slightly loosen the screw to adjust the camera upwards or downwards.
- 3). If you use No.3 screw hole to secure the camera, you can slightly loosen the screw to rotate the camera horizontally..



#### 3. Loosen the tilt adjust screw to adjust the camera surveillance angel, and tighten the screw if the angle-adjust is completed.

