


Riser MicroDucts

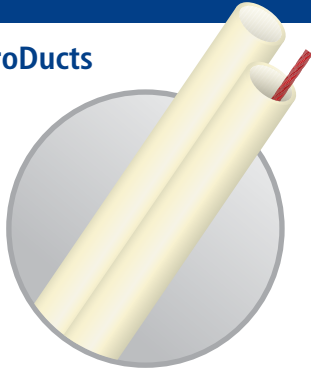

FEATURES:

- Riser Rated MicroDucts produced to: GR-3155-CORE
- ETL Listed to UL 2024 & CSA C22.2 No.262-04
- 50 lb pull string pre-installed

Dura-Line Part #	Feet/Reel	MicroDuct Size (mm)	Nom OD (mm/in.)	Min ID (mm/in.)	Weight (#/ft)	Bend Radius SUP (in.)	Bend Radius UNSUP (in.)	Safe Working Pull Strength (lbs.)
10007322	1,000	12.7/10	12.7/0.50	9.5/0.37	0.042	5	10	172
Dura-Line Part #	Feet/Reel	MicroDuct Size (mm)	Nom OD (mm/in.)	Min ID (mm/in.)	Weight (#/ft)	Bend Radius SUP (in.)	Bend Radius UNSUP (in.)	Safe Working Pull Strength (lbs.)
10006473	1,000	10/8	10.0/0.39	7.9/0.31	0.018	6	10	93
Dura-Line Part #	Feet/Reel	MicroDuct Size (mm)	Nom OD (mm/in.)	Min ID (mm/in.)	Weight (#/ft)	Bend Radius SUP (in.)	Bend Radius UNSUP (in.)	Safe Working Pull Strength (lbs.)
10009168	1,000	8.5/6	8.5/0.334	5.9/0.23	0.022	3	6	89

Plenum MicroDucts



FEATURES:

- Plenum Rated MicroDucts produced to: GR-3155-CORE
- ETL Listed to UL 2024 & CSA C22.2 No.262-04
- 50 lb pull string pre-installed

Dura-Line Part #	Feet/Reel	MicroDuct Size (mm)	Nom OD (mm/in.)	Min ID (mm/in.)	Weight (#/ft)	Bend Radius SUP (in.)	Bend Radius UNSUP (in.)	Safe Working Pull Strength (lbs.)
10005886	1,000	12.7/10	12.7/0.50	10.2/0.40	0.049	5	10	177
Dura-Line Part #	Feet/Reel	MicroDuct Size (mm)	Nom OD (mm/in.)	Min ID (mm/in.)	Weight (#/ft)	Bend Radius SUP (in.)	Bend Radius UNSUP (in.)	Safe Working Pull Strength (lbs.)
10007321	1,000	8.5/6	8.51/0.335	6.7/0.26	0.025	3	6	89

Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.