

SPECIALIZING IN LCD / LED MONITORS



23IPHPVM

OVERVIEW

The ORION Images 23 inch IP HD PVM (Public View Monitor) with built in camera and motion detection sensor becomes a highly effective theft deterrent tool creating awareness that a security surveillance system is in place. The optional built in media card reader turns your loss prevention display into an advertising and marketing tool using pre loaded marketing material that can loop continuously.

FEATURES

- HD-SDI / IP H.264 ONVIF Out
- Built-In WDR 1/3" PANASONIC 2.2 Mega Pixel CMOS
- Tilt Swivel 1080p Camera
- 1000 TV Line Horizontal Resolution
- 0.1 Lux with F1.2 Lens, 0.002 Lux (Sens-up x 256)
- 1920 x 1080 Resolution, 250 Nits, 1000:1 Contrast
- 3D Motion Adaptative De-Interlacer / Auto Source Sequencing / 3D Comb Filter / PIP, PBP
- PIR Motion Sensor (10 ~ 30 feet)
- BNC Video 2 In / 2 Out, Audio 1 In, HDMI 1 In, VGA 1 In, Camera 1 Out, PC Stereo 1 In
- Metal Chassis










23IPHPVM

SPECIFICATIONS


	23IPHPVM
Display	
Screen Size	23 Inch
Backlight Unit	LED BLU
Max. Resolution	1920 x 1080 @ 60Hz
Pixel Pitch	0.265 x 0.265mm
Brightness	250cd/m ²
Contrast Ratio	1000 : 1
Aspect Ratio	16:9
	178° / 168°
Viewing Angle (H/V)	1/8 / 168
Display Color	16.7 Million < 5ms
Response Time	
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	2 In / 3 Out (Include Camera Out)
HD-SDI	1 Out
IP H.264 ONVIF	1 Out (RJ45)
HDMI In	1 ln
VGA In (15Pin D-Sub)	1 ln
Audio In (RCA Type)	1 Left & Right
PC Stereo In	1 ln
Transmitter	
Remote Control	Yes
Audio	
Built-in Speakers	Yes (1W x 2)
Features	(00 (11 x 2)
Filter Type	3D Comb Filter / Noise Reduction
	PIP / PBP
Multi Display Function	
Auto Source Sequencing	Yes
Motion Detection	PIR Motion Sensor (10~30 feet)
3D Motion Adaptive De-interlacing	Yes
Multi Language	English, Spanish, French, German, Italian
Camera	
Camera Type	WDR
Image Sensor	1/3" PANASONIC 2.2 Mega Pixel CMOS
Mechanical Design	Tilt Swivel 1080p Camera
S/N Ratio	>50 dB
Resolution	Horizontal : 1000 TV Lines
Lens Mount	2.8~12mm Vari-focal 3MP Lens (F=1.4)
Sensitivity	0.1 Lux with F1.2 Lens / 0.002 Lux Sens-up x 256
Electronoc Shutter	1/60 ~ 1/60,000 Sec
General	
Outline Dimension (W x H x D)	21.97" x 15.61" x 3.15"
Net Weight	7.6Kg (16.8 lbs)
Material / Color	Electronic galvanized Iron / Black (Optional White)
Part / Labor	3year / 3year
· a.c. LUDVI	
	< 40W
Consumption: < On	< 40W
Consumption: < On	AC100 ~ 240V(50/60Hz)
Consumption: < On Electrical Ratings	AC100 ~ 240V(50/60Hz) DC12V
Consumption: < On Electrical Ratings Operating Temperature	AC100 ~ 240V(50/60Hz) DC12V 0° ~ 40° C / 32° ~ 104° F
Consumption: < On Electrical Ratings Operating Temperature Storage Temperature	AC100 ~ 240V(50/60Hz) DC12V
Consumption: < On Electrical Ratings Operating Temperature Storage Temperature Mounts	AC100 ~ 240V(50/60Hz) DC12V 0° ~ 40° C / 32° ~ 104° F -20° ~ 60° C / -4° ~ 140° F
Consumption: < On Electrical Ratings Operating Temperature Storage Temperature Mounts VESA [™] Mount Size	AC100 ~ 240V(50/60Hz) DC12V 0° ~ 40° C / 32° ~ 104° F -20° ~ 60° C / -4° ~ 140° F 200 x 200mm
Consumption: < On Electrical Ratings Operating Temperature Storage Temperature Mounts	AC100 ~ 240V(50/60Hz) DC12V 0° ~ 40° C / 32° ~ 104° F -20° ~ 60° C / -4° ~ 140° F



INPUT INTERFACE

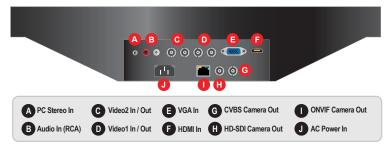

DIMENSIONS

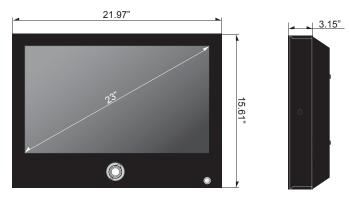

OPTIONAL MOUNTS



ADVANTAGES

Motion Detection

A motion detector is a device that detects moving objects, particularly people. A motion detector is often integrated as a component of a system that automatically performs a task or alerts a user of motion in an area.



After detect any motion

7300 Bolsa Avenue, Westminster, CA 92683 Tel. 714.766.6300 / Fax. 714.766.6310 / sales@orionimages.com / www.orionimages.com

