

## Electromagnetic Lock with Weldable Brackets for Gates

Now with **LIFETIME LIMITED WARRANTY!**\*

- ▶ Weld or Bolt to Gate
- ▶ 4 Knockouts on Junction Box
- ▶ Corrosion-Resistant Finish
- ▶ Water and Vandal Resistant



(Magnetic lock only)

### E-942FC-600SQ

*Electromagnetic Lock with brackets for armature and magnet.*

### E-942FC-600

*Electromagnetic Lock only.*

\*Contact SECO-LARM for details. Applies in U.S.A. & Canada only.

### Features:

- ▶ For outdoor sliding and swinging electric gates.
- ▶ Brackets can be welded or bolted directly to gate.
- ▶ Brackets are zinc-plated for corrosion resistance.
- ▶ Brackets have black finish to match most gates.
- ▶ Lock is water and vandal resistant.
- ▶ Lock has attractive stainless-steel finish.
- ▶ Maintenance-free, factory-sealed design.
- ▶ Holding force - 600 pounds.
- ▶ Prewired for 12VDC operation.
- ▶ Adapter and mounting hardware included.

### Technical Specifications:


|                            | E-942FC-600SQ                    |
|----------------------------|----------------------------------|
| Operating Voltage          | 12VDC or 24VDC                   |
| Holding Force              | 600 lb. (271 kg)                 |
| Current Draw               | 500mA/12V, 250mA/24V             |
| Weight (Approx.)           |                                  |
| Total                      | 10.35 lbs. (4.7 kg)              |
| Maglock & Armature Bracket | 6.4 lbs. (2.9 kg)                |
| Bracket                    | 3.95 lbs. (1.8 kg)               |
| Certifications             | cUL, UL, CE (magnetic lock only) |

Copyright 2007 SECO-LARM U.S.A., Inc. All rights reserved.


The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

### Dimensions:

Magnetic lock and bracket

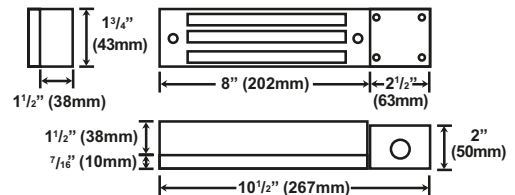

Armature Plate and Bracket

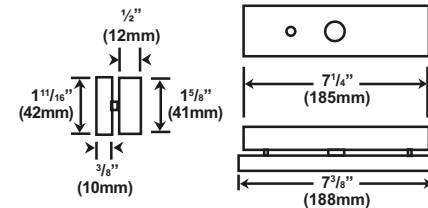

### Installation:

