

**A.C. Circuit Protection**

Service..... 110/120VAC  
 Current..... 15A (Max.)  
 Frequency..... 50/60 Hz

**Primary Suppressor (SASD)**


Response Time..... <5 Nanoseconds  
 Surge Current..... 8x20 700A  
 Clamp Point..... <330 Volts Peak

**Secondary Suppressor (MOV)**

Surge Current..... 8x20 14KA

**General**

Temperature..... -30°C to + 50°C  
 Size..... 6½ H x 3W x 2¼ D

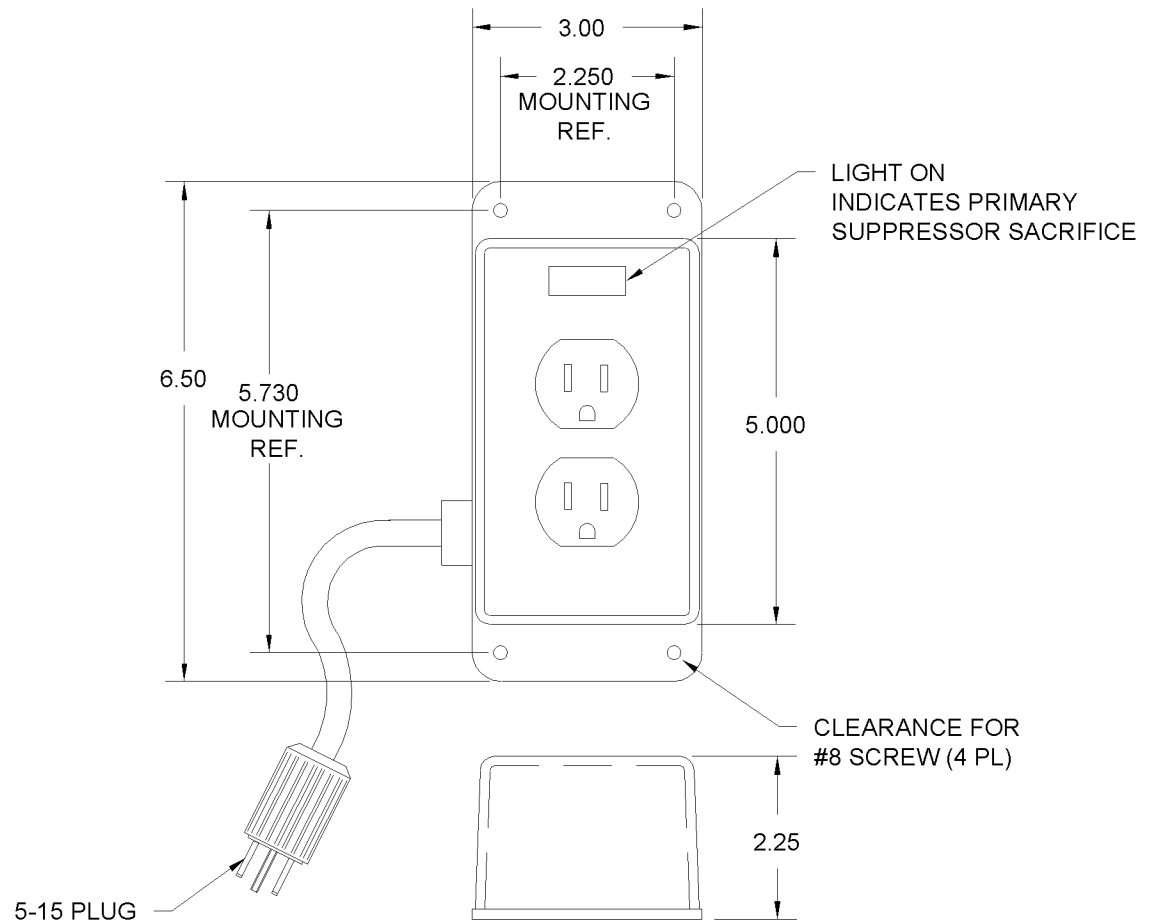

CUSTOMER APPROVAL \_\_\_\_\_ DATE: \_\_\_\_\_

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [ ] ARE MILLIMETERS  TOLERANCES: FRACTIONS=± XX=± ANGLES= ° XXX=±	DRAWN KRH	DATE 11/22/10	10701 Airport Drive, Hayden, ID 83835, USA +1.208.772.8515 FAX +1.208.762.6034 ©2010 Transector Systems, Inc. All rights reserved. 800.882.8110 www.transector.com			
	ENG APPD	PRODUCT MGR				
MATERIAL: NOTED	MARKETING APPD	PROJECT NO.	TITLE <b>DQCP 2372                  PROTECTOR</b>			
THIRD-ANGLE PROJECTION 	NOTICE: THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSECTOR SYSTEMS. ALL RIGHTS RESERVED.					SIZE <b>A</b>
SCALE= NTS			DOCUMENT NAME 1101-084-C	SHEET 1 of 1		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.