## SRWF6U36

## SmartRack® Low-Profile Wall-Mount Rack Enclosure Cabinet







Bracket



**Load Rating** 



Construction



Locking Door and Top Panel



**Accommodates** Standard 19-inch Equipment



Convenient **Cable Access** 



**Mounting Rails** 




**Ample Airflow** 



A Front Door (Lockable/Reversible)

- **Top Panel Door** (Lockable)
- Horizontal Mounting Rails (Adjustable/Reversible)
- **D** 6U Vertical Mounting Brackets
- **E** 2U Slide-Out Patch Panel **Mounting Brackets**
- F Cable Access Holes
- **G** Vents
- **H** Wall-Mounting Slots
- Keys

Also Includes: Owner's Manual and rackmount equipment mounting hardware (12 M6 screws, 12 M6 cup washers and 12 12-24 screws).

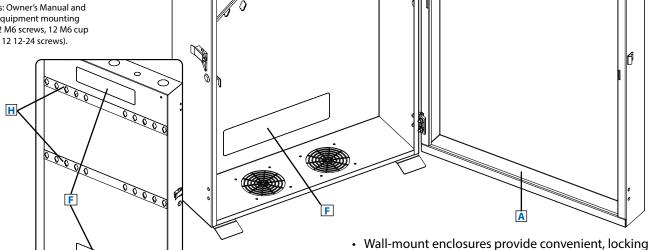



mounted to a stable surface with user-supplied anchors capable of bearing the full load.

**REAR VIEW** 







Specifications	DMPLIANT	Electronic Industries Alliance	HUP	ROHS
Model	SRWF	5U36		
Rack SpacesRack Spaces	6U			
Equipment Mounting Depth	Up to 3	36 in. / 914 mm		
Load Rating*	150 lb.	/ 68 kg		
Unit Dimensions (H x W x D)	43.24 x	c 26.7 x 11.97 in. /	1098 x 678	x 304 mm
Shipping Dimensions (H x W x	D) 48.03 x	31.1 x 16.93 in. /	1220 x 790	x 430 mm
Unit Weight	88.2 lb	. / 40 kg		
Shipping Weight	97 lb./	'44 kg		
Standards	Tested	to EIA-310-E, NO	M, RoHS, Po	CI-DSS
*The load rating includes the combined	weight of the	unit and installed equi	pment. The un	it must be

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS

· 2U slide-out mounting brackets located at the top of the unit provide space for separate patch panels and

storage for rackmount IT devices and other equipment

that should be off the floor, out of the way and secure Low-profile design with vertical equipment mounting is ideal for back office or network closet applications

where space is limited

allow for easy cable access



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

