

18AWG 4 CONDUCTOR DIRECT BURIAL (16 STRAND)




SKU: 209-2329/DB

DESCRIPTION

18AWG, 4 Conductor, Stranded (16 Strand), Direct Burial, PE Jacket, UV Rated Outer Jacket, Pull Box, 500ft.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant

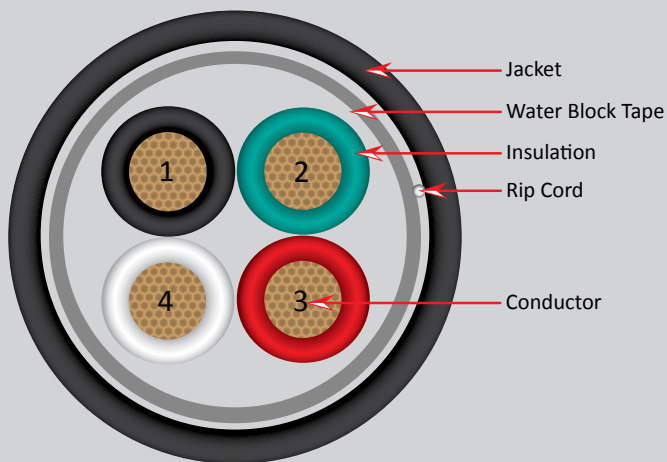

Conductor

Material	Bare Copper
Size	18 AWG
Stranding	16 Strand
Strand Diameter	0.24 mm

Insulation

Material	PVC
Color	Black, Red Green, White
Insulation Thickness (mm)	0.30
Outer Diameter (± 0.01 mm)	1.75

Jacket

Material	PE (UV)
Color	Black
Jacket Thickness (mm)	0.60
Outer Diameter (± 1.0 mm)	6.6

Water Block Tape

Yes

Ripcord

Material	Nylon (150D)
----------	--------------

Electrical Performance

Rated Temperature	-15° ~ 70 °C
Voltage Endurance	DC 300V/min
Conductor Resistance	$\leq 25.2\Omega/1000m$

Marking on Jacket

VERTICAL 4003289 cETLus AUDIO CABLE 18AWG 4 COND
16 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL
XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 09/2016

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.