

VTC-TNT8RMA4

Transcendent Gen. IV 8 MegaPixel [4K] Advanced A.I. Motorized Turret Camera [PRELIMINARY SPECS]



KEY FEATURES

- 1/2.8" 8 MegaPixel [4K] Progressive Scan CMOS Sensor
- NDAA Compliant
- Up to 30fps live view @ 8 MegaPixel (3840x2160)
- 2.8~12mm Motorized Varifocal Lens
- Matrix IR (up to 165' IR Range)
- True Wide Dynamic Range (120dB)
- True Mechanical Day/Night function by ICR
- XD-DNR (3D & 2D-DNR) Noise Reduction
- Gen. IV Advanced Analytics: Regional Entrance / Exiting Detection, Line Crossing, Target Counting [All by Human / Motor Vehicle Classification] Face Detection, Video Blur, Video Color Cast Detection, Abnormal Video
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 1 Ch. Audio In + Built-in Mic*
- Remote Viewing via CMS, Internet Explorer, iOS & Android Apps
- ONVIF Compliant
- MicroSD Card Slot for Local Recording (256GB)
- IP67 Weather Resistance
- Optional Junction Boxes (VT-TJB01, VT-TJB021), Wall Mounts (VT-TWM03, VT-TWMT-4) and Pendant Mounts (VT-TPDM-2 [reqs. VT-TJB01], VT-TPDM-3 [reqs. VT-TJB021]) [See Additional Mounting Options Below]
- 12VDC & PoE (Power over Ethernet) Operation
- Available in Ivory or Charcoal (VTC-TNT8RMA4B)
- 3-Year Warranty



TRANSCENDENT "GEN IV" SERIES NDAA COMPLIANT IP CAMERAS WITH AI POWERED FACIAL DETECTION AND MORE!

Transcendent Series NDAA Compliant High Definition 8 Megapixel [4K] IP Network Cameras with Gen. IV Advanced Analytics including Face Detection and Target Counting offer unprecedented performance and value. These simple, easy to install, attractively styled, IP Network Cameras transmit over remote viewing via CMS, Internet Explorer, and iOS & Android Apps.

*Please research local, state and federal laws regarding the implementation of audio surveillance.

GEN. IV ADVANCED ANALYTICS



FACIAL DETECTION


Security personnel can find out who entered / left the restricted area and at what time

TARGET COUNTING

Keep count of vehicles, motorbikes, bicycles and people in a given area

REGIONAL ENTRANCE/EXIT

Begin NVR recording and receive an alert upon subjects entering / exiting; ideal for

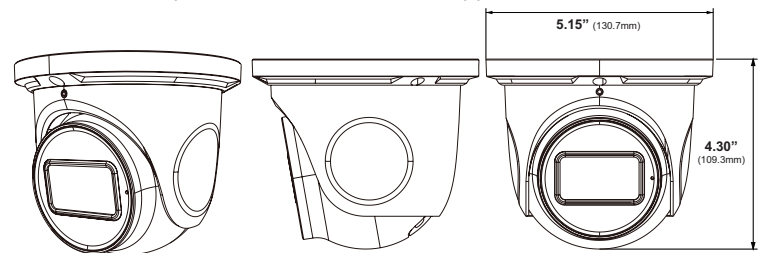

Pair with VITEK Transcendent Series Network Recorders VT-TNR818PF, VT-TNR1646PF, and VT-TNR3216PF with Built-in PoE and Fully Programmable Intelligent Analytics including Facial Detection.

An Eye On Innovation

- VT-TJB01** Optional Junction box for Cable Management
- VT-TJB021** Optional Junction box for Cable Management
- VT-TPDM-2** Optional Pendant Mount - reqs. VT-TJB01
- VT-TPDM-3** Optional Pendant Mount - reqs. VT-TJB021
- VT-TWM03** Optional Wall Mount
- VT-TWMT-4** Optional Wall Mount
- VT-TPLMT** Universal Pole Mount Adapter - reqs. VT-TWM03
- VT-TCNMT** Universal Corner Adapter - reqs. VT-TWM03



www.vitekccv.com



DETAILED SPECIFICATIONS

Image Sensor	1/2.8" 8.0 Megapixel [4K] Progressive Scan CMOS
NDAA Compliant	Yes
Image Size	8 MegaPixel (3840 × 2160)
Resolution	8MP (3840×2160), 6MP(3072×2048), 5MP(2592×1944), 4MP(2592×1520), 2K(2560×1440), 3MP(2304×1296), 1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240
Min. Illumination	0.01 lux @F1.2, AGC ON; 0 lux with IR, 0.015 lux @ F1.4, AGC ON; 0 lux with IR
Lens	2.8mm~12mm Motorized Varifocal
Day / Night	True Day/Night by ICR
IR LEDs / IR Distance	2 Matrix Style IRs / Up to 165'
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
Audio Compression	G.711A / G.711U
Main-Stream	60Hz: 8/6/5/4MP/2K/3MP/1080P/720P(1~30fps), 50Hz: (1~25fps) HFR:1080P 720P(60Hz: 1 60fps; 50Hz: 1~50fps)
Sub / Third Stream	1080P/720P/D1/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps), 720P/D1/CIF/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate / Type	64 Kbps ~ 12 Mbps / VBR, CBR
Wide Dynamic Range	120dB Super WDR
Other Features	Highlight Compensation, Backlight Compensation, DeFog, Hardware Reset
Digital Noise Reduction	XD-DNR (3D-DNR & 2D-DNR)
Image Setting	ROI, Saturation, Brightness, Chroma, Contrast, Sharpen, NR; adjustable through client software / web browser
Gen. IV Advanced Analytics	Regional Entrance / Exiting Detection, Line Crossing, Target Counting [all by Human / Motor Vehicle Classification] Face Detection, Video Blur, Video Color Cast Detection, Abnormal Video
Smart Alarm	Motion Detection, SD Card Error, SD Card Full
Region of Interest (ROI)	Each ROI to be configured separately
Audio	1 Ch. Audio In + Built-in Mic*
Video Output	NA
Alarm	NA
Local Storage	Built-in MicroSD Card Slot (up to 256GB)
Remote Viewing	CMS / Web Browser / Mobile (iOS/Android)
Supported Browsers	Internet Explorer, Chrome and Firefox with IE Tab
Connection Protocol	ONVIF
Ingress Protection	IP67
Power Input	12VDC / PoE
Pwr Consumption 12VDC, PoE	350mA (LEDs Off) / 750mA (LEDs On), <8W
Working Environment	-22° ~140° / < 95% Humidity
Weight	24.69 oz. / 1.54 lbs. / .7kg (NET) 29.98 oz. / 1.87 lbs / .85kg (SHIPPING)
Dimensions (Dia × H)	5.15" × 4.30" (130.8mm × 109.2mm)

*Please research local, state and federal laws regarding the implementation of audio surveillance.