## **MSB550W**

# Outdoor Weather Resistance Mechanical Switch Bar





- Water Sealed Switches
   The MSB550W features a high-quality watertight miniature snap action switch with a monoblock construction, ensuring high sealing capacity.
   Switch body meets IP67 (IEC 529) requirements.
- Heavy Duty Construction
   The MSB550W utilizes heavy-duty aluminum extrusion and rugged end caps. The mounting assembly is all metal. The rigid construction prevents any malfunction.
- Only 1/8" Total Bar Movement
   The MSB550W has a maximum movement of only .125". Trigger activation to release the electromagnetic lock is quick and quiet.
- Perfect Companion for Gate Lock Solutions
   The MSB550W's watertight switches makes it a perfect companion for outdoor gate solutions. For additional system components, see next page.






#### **Electrical Specifications**

2 SPDT, 3 Amp @ 30VDC (RESIS- TIVE)
-40°F to 185°F
6.5 lbs





Only 1/8" movement for quick, quiet operation

The smallest profile in the industry to provide ample clearance for egress and maintain superior aesthetics of high profile openings.



1









#### PRODUCT SKU SAMPLE: MSB550-2V 42 W



#### 1| SPECIFY MODELS

PT-3 Power Transfer included

MSB550-2VW 628 Aluminum Anodized MSB550-2YW 335 Black Anodized

#### 2| SPECIFY OPTIONS

Standard Length: 36" Door **Bars for Wide Doors:** 

42 For 42" Wide Door. May be field cut.

48 For 48" Wide Door. May be field cut.

### GATE EMLOCK® SOLUTIONS / ACCESSORIES

GATE MAGNETIC LOCK

1575U Gate Magnetic Lock

1576U Gate Magnetic Lock with face drilled mounting

2 GATE MOUNT BRACKETS

1575BK / 1576-ZBV / **Application Specific Brackets** 1576-AB / 1576-BK


OUTDOOR ACCESS CONTROL

923 Narrow Stand Alone Digital Keypad

Request-To-Exit

48201U ADA approved Narrow Mullion Push Plate Switch MSB550W Outdoor Weather Resistance Mechanical Switch Bar

## 1575 Gate EMLock® Solutions

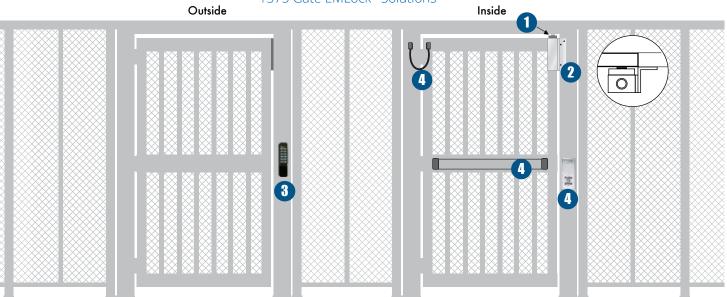

#### 1576 Gate EMLock® Solutions

