



PRODUCT FEATURES

- Ultra-secure collapsing blind nuts mount to door frame for strength and reliability
- Fully sealed for weather-proof operations
- 10 ft. [3.05m] of jacketed, stranded conductor cable
- Automatic dual voltage - no field adjustment required
- Instant release circuit - no residual magnetism
- Noise suppression - no interference with sensitive electronics
- Efficient, low power usage
- All ferrous metal surfaces plated for durability and rust resistance
- Fits in 2.5" of flat mounting space
- MagnaCare Lifetime Replacement No Fault Warranty

PRODUCT OPTIONS

- Flexible mounting options for
 - › *Out-swing doors*
 - › *In-swing doors (-F, add to any model for Face Drilled)*
 - › *Metal, wood, Herculite or glass with aluminum frames*
 - › *Swinging and sliding gates*
- BondSTAT magnetic bond sensor - Patented (MBS)
- Integrated door position switch (DPS)
- Universal threaded conduit fitting is 1/2" female - 3/4" male
- Split Strike Plates and Offset Strike Plates
- Dress Covers

SPECIFICATIONS

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA A156.23, Grade 1; E08501-1000
- CSFM- California State Fire Marshal Approved
- MEA - City of New York Approved
- CE:EN 50081-1(92), EN 61000-6-2(99) Approved
- Patent: 8,094,017

Holding Force:

1200lbs. [544kg]

Dimensions:

Magnalock: 8" L x 1-3/4"D x 3"H

Strike: 6" L x 1/2"D x 2-3/4"H

Electrical:

250mA at 12VDC

150mA at 24VDC

Operating Temperature:

-40 to +140F [-40 to +60C]

Indoor or Outdoor use

Shipping Weight:

11lbs [5kg]

Finishes:

US32D/630 - Satin Stainless Steel

M62 SERIES

1200lbs Holding Force


The Ultimate in Magnalock® Versatility for Indoor/Outdoor Higher Security

The M62 is a strong, easy-to-maintain solution for interior, perimeter and exterior access control. With unsurpassed durability, the M62 will last long after most buildings wear out. Flexible mounting options support applications for hollow metal, concrete filled metal, wood, or glass with aluminum frames, and Herculite doors. Options include single and double door configurations, or specialty applications such as gates and fences.

MODELS

PART # | Description

M62	M62 Magnalock- 12/24VDC
M62B	M62 Magnalock- 12/24VDC, MBS
M62BD	M62 Magnalock- 12/24VDC, MBS, DPS
M62D	M62 Magnalock- 12/24VDC, DPS
M62F	M62 Magnalock- 12/24VDC, Face Drilled
M62FB	M62 Magnalock- 12/24VDC, Face Drilled, MBS
M62FBD	M62 Magnalock- 12/24VDC Face Drilled, MBS, DPS
M62FD	M62 Magnalock- 12/24VDC, Face Drilled, DPS
M62FG	M62 Magnalock- 12/24VDC, Face Drilled, Gate Conduit
M62FGB	M62 Magnalock- 12/24VDC, Face Drilled, Gate Conduit, MBS
M62FGBD	M62 Magnalock- 12/24VDC, Face Drilled, Gate Conduit, MBS, DPS
M62FGD	M62 Magnalock- 12/24VDC, Face Drilled, DPS, Gate Conduit
M62G	M62 - Gate Conduit
M62GB	M62 - Conduit, MBS
M62GBD	M62 - Conduit, MBS, DPS
M62GD	M62 - Gate Conduit, DPS

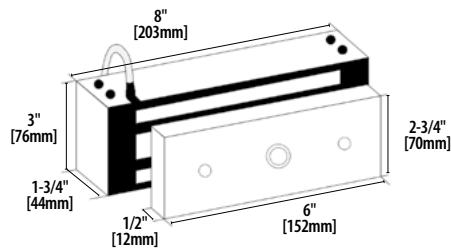

DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON®

ASSA ABLOY



LISTED