



## 2-Port HDMI KVM Switch

TK-215i (v1.0R)

- Control two computers with one set of console controls
- Works with displays with an HDMI port
- Full HD 1080p resolution
- HDMI and 3.5 mm analog audio
- Fully integrated cabling
- Ergonomic computer toggle switch
- No CD installation
- USB Powered - No external power adapter

TRENDnet's 2-Port HDMI KVM Switch, model TK-215i, controls two computers (with an available HDMI port) with one set of console controls. No driver installation required, simply plug in the integrated cables to share two computers with a full HD 1080p display. The TK-215i supports HDMI and 3.5 mm analog audio and features an ergonomic computer toggle switch.



**Computers**  
Control up to 2 computers



**1080p HD**  
Supports full HD 1080p (progressive 1920 x 1080 pixels) with a 60 Hz refresh rate



**2-Way Audio**  
Full audio support through HDMI cable connections with optional 3.5 mm microphone and speaker jacks



**Toggle Switch**  
Use the integrated 1.5 m (5 ft.) cable to position the toggle switch in the most ergonomic location



**Console Connectors**  
Emulation Technology supports advanced USB keyboard and mouse designs



**HDMI Display**  
HDMI 1.3 with HDCP support



**Computer Ports**  
Requires free USB and HDMI ports from connected computer




**Integrated Cables**  
All required cables are integrated



**Switch Software**  
Windows® and Mac® based KVM switch software to define hot keys and create auto-scan intervals

## Networking Solution

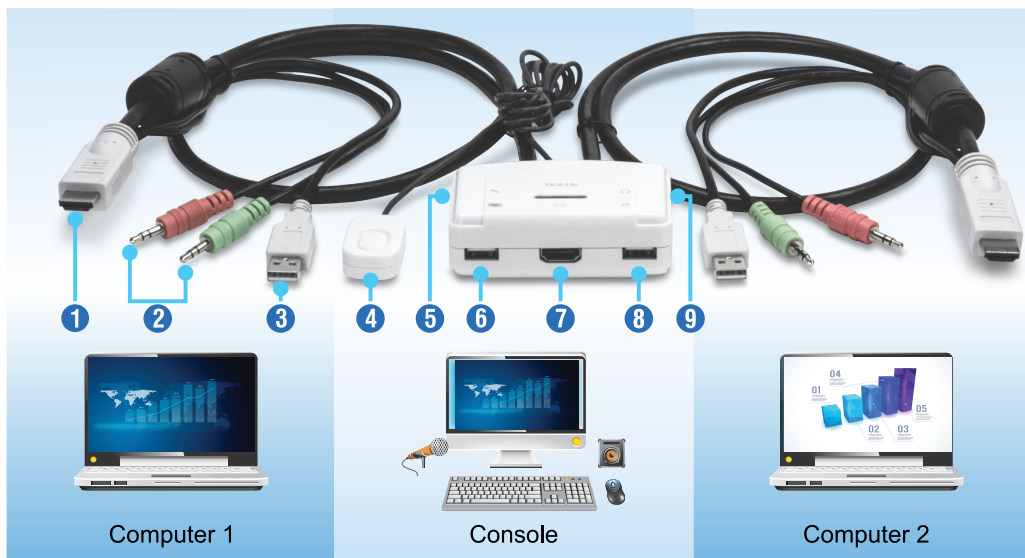

### Computer 1-2

- 1 HDMI connector
- 2 Optional analog microphone & speaker connectors
- 3 USB keyboard/mouse connector

### Console

- 4 Computer toggle switch
- 5 Microphone port
- 6 USB keyboard port
- 7 HDMI display port
- 8 USB mouse port
- 9 Speaker port

## Specifications

### Console Port on KVM

- Keyboard: USB
- Mouse: USB
- Monitor: HDMI 1.3 (19-pin)
- Speaker jack: 3.5 mm
- Microphone jack: 3.5 mm

### Computer Connections (up to 2)

- Keyboard/mouse: USB 2.0 type A
- Monitor: HDMI 1.3 (19-pin)
- Speaker jack: 3.5 mm
- Microphone jack: 3.5 mm

### Monitor Resolution

- 1920 x 1080 @ 60 Hz

### Audio Support

- 5.1 Audio support over HDMI cables
- Analog audio over speaker and microphone jacks

### LED

- Computer 1 and Computer 2

### Switching Control

- One touch toggle switch
- Keyboard hot key commands
- KVM Switch Software

### Supported OS

- Windows® and Mac®

### Operating Temperature

- 0 – 40 °C (32 – 104 °F)

### Operating Humidity

- Max. 90 % non-condensing

### Dimensions

- Unit: 85 x 58 x 28 mm (3.3 x 2.3 x 1.1 in.)
- Integrated Cable: 85 cm (3 ft.)
- Toggle switch: 150 cm (5 ft.)

### Weight

- 350 g (12.3 oz.)

### Warranty

- 2 year limited

### Certifications

- CE
- FCC

### Package Contents

- TK-215i
- Quick Installation Guide
- CD-ROM (Utility & User's Guide)

