


# UN-XVR302-16Q-IF

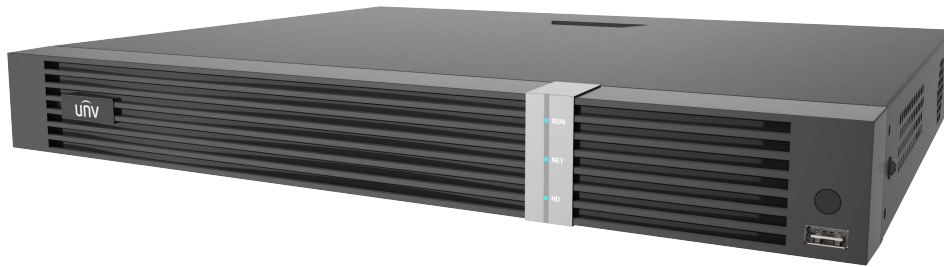

## Key Features

- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- Support audio over coaxial cable
- 16-channel BNC input
- Up to 8MP resolution for recording
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coaxial cable
- Support 1-ch face recognition with analog camera or third-part IPC
- Support 4-ch face recognition with UNV face capture IPC
- Up to 16 face libraries, total capacity of 100000 face images


## Specifications

Model	UN-XVR302-16Q-IF
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch (only IP up to 24ch), each channel up to 4K
Supported Analog Camera Types	<p><b>Support AHD input:</b>            8MP@15fps(channel1-channel4)            5MP@20fps            4MP@30fps            3MP@30fps (channel1-channel4)            1080P@30fps            720P@60fps</p> <p><b>Support TVI input:</b>            8MP@15fps(channel1-channel4)            5MP@20fps            4MP@30fps            3MP@20fps (channel1-channel4)            1080P@30fps            720P@60fps</p> <p><b>Support CVI input:</b></p>

	8MP@15fps(channel1-channel4) 5MP@20fps 4MP@30fps 1080P@30fps 720P@60fps <b>Support CVBS input</b>
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
<b>Network</b>	
Incoming Bandwidth	72 Mbps
Outgoing Bandwidth	80 Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	4K(3840X2160)/30Hz,1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz,1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
<b>Encoding</b>	
Recording Frame Rate	Main stream: 8MP Lite@8fps(channel1-channel4) 5MP Lite@12fps 4MP Lite@15fps 3MP@15fps(channel1-channel4) 2MP@15fps 720P@30fps Sub stream: D1@30fps (Max)
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
<b>Hard Disk</b>	
SATA	2 SATA interfaces
Capacity	up to 6TB for each HDD
<b>External Interface</b>	
Network Interface	1-RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	4
Alarm Out	1
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 12 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	380mm ×318mm× 53.5mm (14.96" × 12.51"×2.1")

Weight (without HDD)	≤2.0 Kg (4.4lb)
----------------------	-----------------

## Dimensions

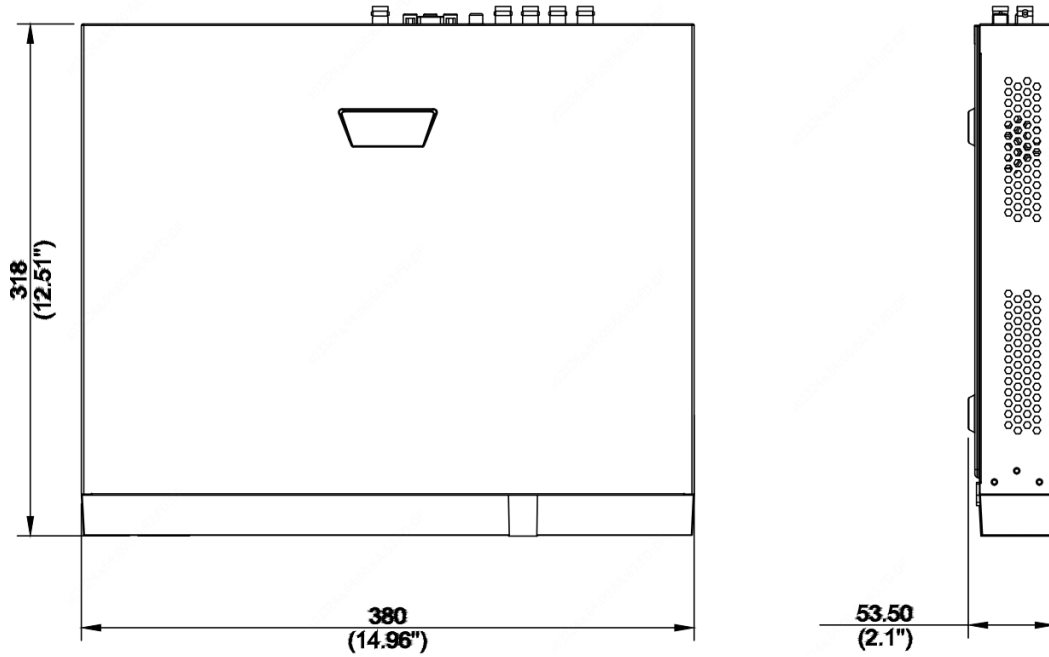

## Rear Panel

