

Network Video Recorder

NVR302-E-P Series



Key Features


- 8/16-channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Up to 8TB for each disk
- Support various VCA detection alarm and VCA search
- Plug & Play with up to 8/16 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications

	NVR302-08E-P8	NVR302-16E-P8	NVR302-16E-P16
Video/Audio Input			
IP Video input	8-ch	16-ch	
Two-way Audio input	1-ch, RCA		
Network			
Incoming bandwidth	80Mbps	160Mbps	
Outgoing bandwidth	160Mbps	320Mbps	
Remote connection	128		
Video/Audio Output			
HDMI/VGA	VGA:		


output	1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
Audio Output	1-ch, RCA	
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Synchronous Playback	8-ch	16-ch
Decoding		
Compression	H.265/H.264	
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@20, 16 x 1080P@25	
Hard Disk		
SATA	2 SATA interfaces	
Capacity	up to 8TB for each disk	
External Interface		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
Network Function	HTTP,HTTPS,UPnP, RTSP,RTP, SMTP, NTP, DHCP, DNS,IP Filter, PPPoE, DDNS, FTP, IP Server, P2P	
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0	
Alarm In	4-ch	
Alarm Out	1-ch	
PoE		
Interface	8 independent 100 Mbps PoE network interfaces	16 independent 100 Mbps PoE network interfaces
Supported Standard	IEEE 802.3af/at	
General		
Power Supply	100 ~ 240 VAC	
Consumption (without HDD and PoE)	≤ 20 W	
PoE	Max 30W for single port Max 130W in total (16.25W for each)	Max 30W for single port Max 240W in total (15W for each)
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity	10% ~ 90%	
Dimensions	380 mm × 315mm × 46 mm	
Weight (without HDD)	≤2.42kg (5.34lb)	≤2.48kg (5.47lb)

Dimensions

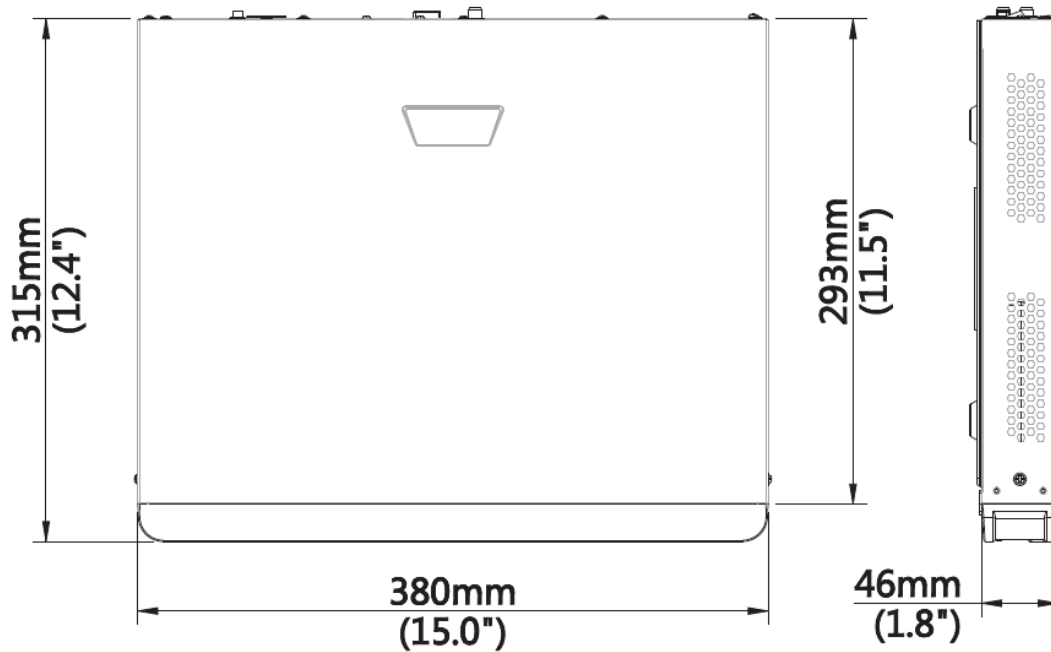

Rear Panel

Take **NVR302-16E-P8** for example

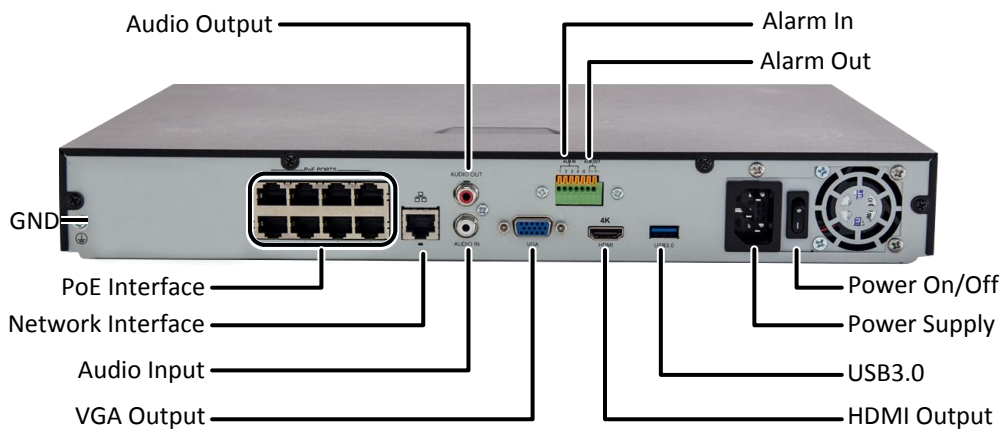

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2016 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.