

# 14AWG 2 CONDUCTOR STRANDED SHIELDED (105 STRAND)




## DESCRIPTION

14AWG, 2 Conductor, Stranded Shielded (105 Strand), PVC Jacket, Pull Box, 500ft.

## APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications

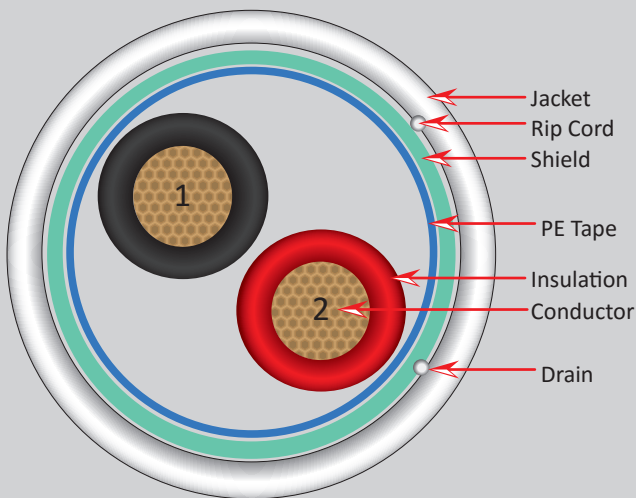

**SKU: 209-2347/S/5WH**

### Conductor

#### 2 Core (Stranded)

Material	Oxygen Free Copper Wire Strands
Size	14 AWG
Stranding	105 Strand
Strand Diameter	0.16 mm

### Insulation

Material	PVC
Average Thickness	0.355 mm
Min. Point Thickness	0.33 mm
Insulation Diameter (±0.05mm)	2.60 mm

PE Tape	Yes
Drain wire(TC)	7/0.20
AL Foil	Yes
PE Tape	Yes
Assembly Dia.(±0.1mm)	5.40

### Jacket

Material	PVC
Color	White
Average Thickness	0.60 mm
Min. Point Thickness	0.54 mm
Outer Diameter (±0.1mm)	6.70 mm

### Insulation Color

Black, Red

### Ripcord

Material	Nylon (150D)
----------	--------------

### Electrical Performance

Rated Temperature (°C)	70
Voltage Rating	30V
Reference Standard	ETL, CMR, CL3

### Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before: Tensile Strength (Mpa)	>=13.8
Aging: Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After: Tensile Strength (Mpa)	>=85% of unaged
Aging: Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

### Marking on Jacket

VERTICAL 4001453 cETLus AUDIO CABLE 14 AWG 2 COND 105 STRANDED, SHIELDED OXYGEN FREE CMR CL3R RoHS V1379PXXXX XXXFT

**VERTICAL CABLE**

951.696.7772 California

800.749.2447 Florida

845.391.8318 New York



[www.verticalcable.com](http://www.verticalcable.com)

Rev. 02/2017

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.