



Popular double door applications


Double door applications




Mortise lock and vertical rod device combination — same direction



Two rim devices with mullion — same direction




Two vertical rods — double egress



Two vertical rod devices — same direction (do not use with overlapping astragal)

Door handing

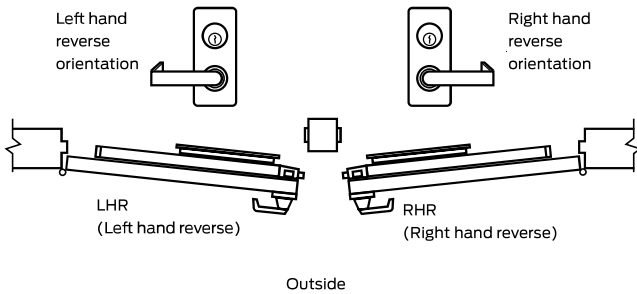

Outside trim operation

Trim operation lever

Standard operation




Key locks and unlocks lever.

NL Function



Lever will be locked when key is removed.

Blank escutcheon



Lever always active. BE suffix, E.G., 371L-BE.



Key retracts latch bolt, knob is rigid.

K-NL function trim is locked when key is removed.

Available with 88 Rim only.

To order trim, specify 880K-NL-R.

Cylinder options



Mortise — 3215 (Schlage B502-191 cams)



Rim — 3216