


9847/9947 Concealed vertical rod device

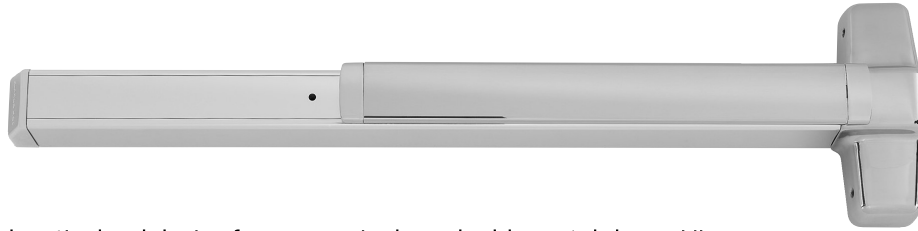

9847/9947 Concealed vertical rod device for use on single or double metal doors, UL listed for panic exit hardware. These are certified to ANSI/BHMA A156.3 2014, Grade 1. The 9847 device has a smooth mechanism case and the 9947 device has a grooved case. The concealed vertical rod device is non-handed except when the following device options are used: SD (special dogging), or SS (signal switch).

Specifications

Device functions	Device ships EO/DT/NL; Field selectable; For TP, K or L remove NL drive screw from device.
Device lengths	2' 2' (610mm) Door size 3' 2'4" to 3' (711mm to 914mm) Door size 4' 2'10" to 4' (864mm to 1219mm) Door size
Device centerline from finished floor	39 5/8" (1006 mm) Standard Adjustable from 35 5/8" (905mm) to 49 5/8" (1260mm)
Center case	8" x 2 3/4" x 2 3/8" (203mm x 70mm x 60mm)
Mechanism case	2 1/4" x 2 1/4" (57mm x 57mm)
Projection	Pushbar neutral – 3 13/16" (97mm) Pushbar depressed – 3 1/16" (78mm)
Latch bolt	Deadlocking top and bottom bolt, 5/8" (16mm) throw
Door undercut	1/4" (7mm) recommended
Top and bottom latch case	4 1/2" x 2 1/8" x 1 1/2" (114mm x 54mm x 38mm)
Vertical rods	Round 2-piece adjustable rods – Top rod adjustable from 6'8" (2027mm) to 8'4" (2533mm). Bottom rod adjustable 35 5/8" (905mm) to 49 5/8" (1260mm). Extension rod kits available for doors over 8'4" (2533mm).
Finishes	605, 606, 612, 625, 626/626AM, 628, 710, 711 and 643e (619 and 630 available with 98 Series only)
Fasteners and sex bolts (SNB)	Includes screw pack for 1 3/4" (44mm) to 2 1/4" (57mm) thick metal doors (Optional 425 SNB available)

Features and options

Electrified options

- LX** Latch bolt monitor switch
- RX** Request to exit
- RX2** Double request to exit
- E** Electric locking and unlocking trim
- EL** Electric latch retraction
- QEL** Quiet electric latch retraction
- SS** Signal switch
- CX** Chexit delayed exit
- ALK** Alarm exit kit
- WP-RX** Waterproof request to exit
- CON** Allegion Connect

Mechanical options

- GBK** Glass bead kit
- LBR** Less bottom rod
- PL** Pullman latch
- PN** Pneumatic latch retraction
- SNB** Sex bolts
- SEC** Security screws
- WH** Weep holes

Dogging feature

Hex key dogging standard

Dogging options

- CD** Cylinder dogging
- CD-CX** Chexit cylinder dogging
- CDSI** Cylinder dogging with security indicator
- HDSI** Hex dogging with security indicator
- SD** Special center case dogging
- LD** Less dogging
- DI** Dogging indicator
- CI** Cylinder dogging indicator

Strikes

- Top – 338** – Unfinished
- Bottom – 385A** – Unfinished

Accessories

