

## Device types

# 9827-F/9927-F Surface mounted vertical rod fire device




9827-F/9927-F Fire exit surface mounted vertical rod device are certified to ANSI/BHMA A156.3 2014, Grade 1 and UL listed for fire exit hardware. See page 67 for detailed information on UL fire exit hardware label and door opening size information. The 9827-F device has a smooth mechanism case and the 9927-F device has a grooved case. The surface vertical rod device is non-handed except when the following device options are used: SS (signal switch), and WS (tornado/hurricane). Vertical rod and latch guards are available to protect the bottom rod of the exit device from damage by impacts of carts or gurneys passing through doors. Rod and latch guards can be used on hollow metal or tin clad composite fire doors.

### Specifications

Device functions	Device ships EO/DT/NL; Field selectable; For TP, K or L remove NL drive screw from device
Device lengths	2'            2' (610 mm) Door size 3'            2'4" to 3' (711mm to 914 mm) Door size 4'            2'10" to 4' (864 mm to 1219 mm) Door size
Device centerline from finished floor	39 5/8" (1006 mm)
Center case	8" x 2 3/4" x 2 3/8" (203mm x 70mm x 60mm)
Mechanism case	2 1/4" x 2 1/4" (57mm x 57mm)
Projection	Pushbar neutral – 3 13/16" (97 mm) Pushbar depressed – 3 1/16" (78 mm)
Latch bolt	Deadlocking anti-friction top and bottom bolt, 5/8" (16mm) throw
Door undercut	1/4" (7mm) recommended
Top and bottom latch case	4 1/2" x 2 1/8" x 1 1/2" (114mm x 54mm x 38mm)
Vertical rods	1/2" square tubing, standard rods accommodate 7' (2134mm) doors. Top rod length: 34 15/16" (887mm); Bottom rod length: 31 1/2" (794mm). Extension rods available in 3' (914mm) for doors over 7' One piece top rod is available for 8' (2438mm) and 10' (3048mm) doors
Finishes	605, 606, 612, 625, 626/626AM, 628, 710, 711 and 643e (619 and 630 available with 98 Series only)
Fasteners and sex bolts (SNB)	Includes screw pack for 1 3/4" (44mm) to 2 1/4" (57mm) thick metal or wood doors, and 325 SNB for top and bottom latch (Optional 425 SNB available)

### Accessories

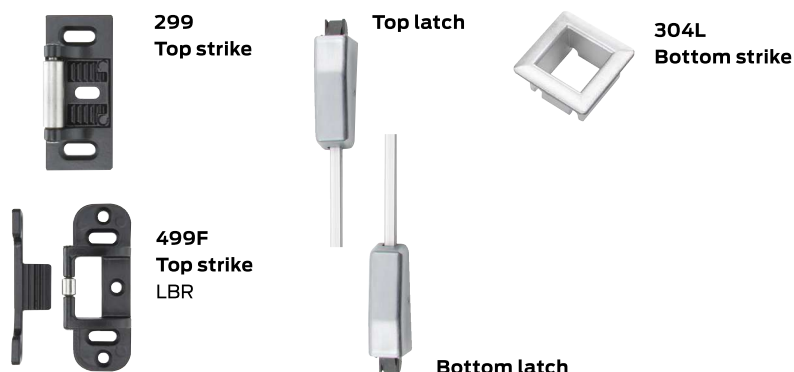

### Features and options

#### Electrified options

<b>LX</b>	Latch bolt monitor switch
<b>RX</b>	Request to exit
<b>RX2</b>	Double request to exit
<b>E</b>	Electric locking and unlocking trim
<b>EL</b>	Electric latch retraction
<b>QEL</b>	Quiet electric latch retraction
<b>SS</b>	Signal switch
<b>CX</b>	Chexit delayed exit
<b>ALK</b>	Alarm exit kit
<b>WP-RX</b>	Waterproof request to exit
<b>CON</b>	Alliegon Connect

#### Mechanical options

<b>AX</b>	Accessible device (LBR only)
<b>GBK</b>	Glass bead kit
<b>LBR</b>	Less bottom rod
<b>PL</b>	Pullman latch
<b>PN</b>	Pneumatic latch retraction
<b>QM</b>	Quiet mechanical
<b>SNB</b>	Sex bolts
<b>SEC</b>	Security screws
<b>SLM</b>	Special laminate material blocking
<b>WH</b>	Weep holes
<b>WS</b>	Tornado and hurricane tested

#### Dogging option

No mechanical dogging;  
EL and QEL options available

#### Strikes

**Top – 299F** – (499F LBR) Dull black  
**Bottom – 304L** – Unfinished