



SF1005-QR

Multi-Biometric Face & Palm vein Access Control Reader

FEATURES:

- Enhanced Visible Light Facial Recognition with Deep Learning
- Multiple verification with palm vein, RFID and/or Facial Recognition
- 5-inch touch LCD
- Dual-camera supports both infrared & visible light to achieve superior accuracy and matching-speed
- 6,000 face templates capacity
- Recognition distance from 11 -23 in
- Inter-operates with external RS232/485 and Wiegand reader
- Supports TCP/IP and optional Wi-Fi communication

Extended read-range reduces foot traffic bottlenecks. SF1005-QR recognizes authorized users' faces from up to 6 feet away while they're walking. It's also designed with a 30-degree angle tolerance so users don't need to stop and stare directly into its camera before attempting door/turnstile access.

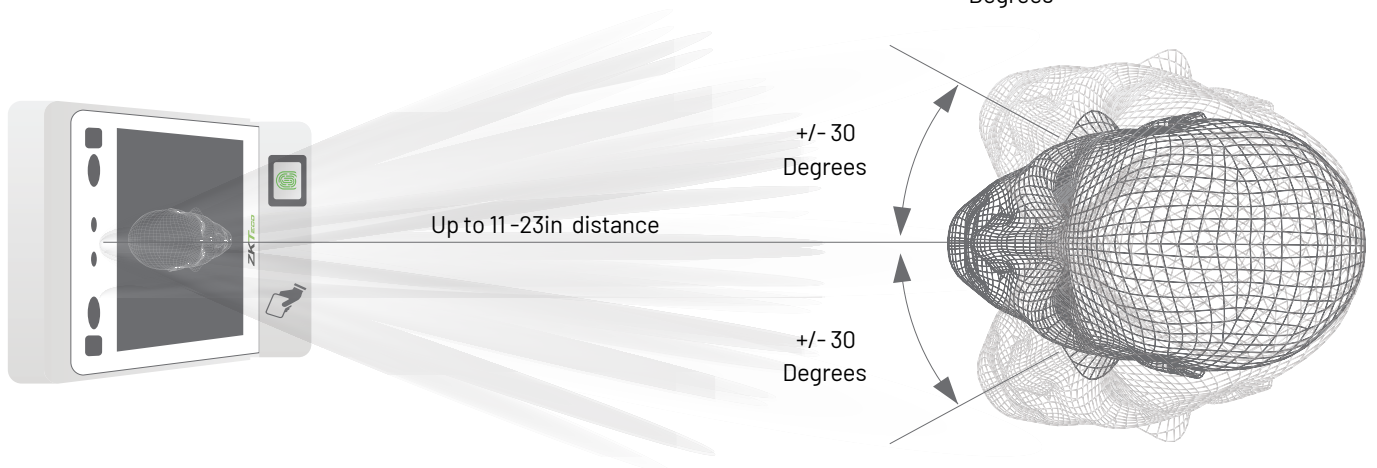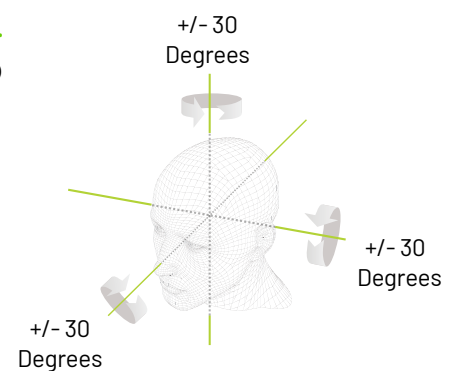

SPECIFICATIONS:

Model	SF1005-QR
LCD	5-inch touch screen
CPU	Quad-core A17 1.8 GHz
Memory Camera	2G RAM / 16G ROM
Communication	2MP dual lens, infrared and visible light RS-232/485 and Wiegand input for interoperability with external readers and Wiegand output for access control panels
Accessory	Door lock, door sensor, alarm, exit button, & aux input
Audio	Loudspeaker
User Capacity Face	10,000
Capacity Fingerprint	3,000
Capacity RFID	10,000
Card Capacity Voltage	10,000
Temperature	200,000
Humidity	12V 3A -40 - 140 ° F 20% - 90%
Software	ZKBioSecurity

OPTIONAL ZKTECO ACCESSORIES:



RS485
Fingerprint
Reader




RFID Reader



Exit Button

DIMENSIONS (INCHES)

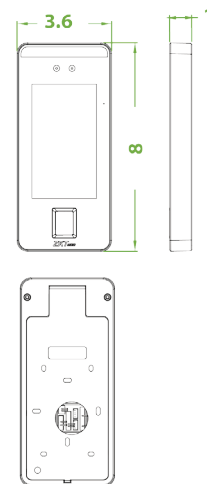

ZKTeco USA

1600 Union Hill Rd., Alpharetta GA 30005
Phone: (862) 505 - 2101 • Fax: (862) 204 - 5906 • sales@zktecousa.com • www.zktecousa.com

© Copyright 2020. ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company.
All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners.
All specifications are subject to change without notice. All rights reserved.