

GV-POE0801 8-Port 802.3at Web Management PoE Switch




Packing List

1. GV-POE0801 x 1
2. AC Power Cord x 1
3. Screw x 8
4. Rack Mount Kit x 1
5. Software CD x 1
6. GV-POE0801 Quick Start Guide x 1

Note: If any of these items is found missing or damaged, please contact your local supplier for replacement.

Front Panel

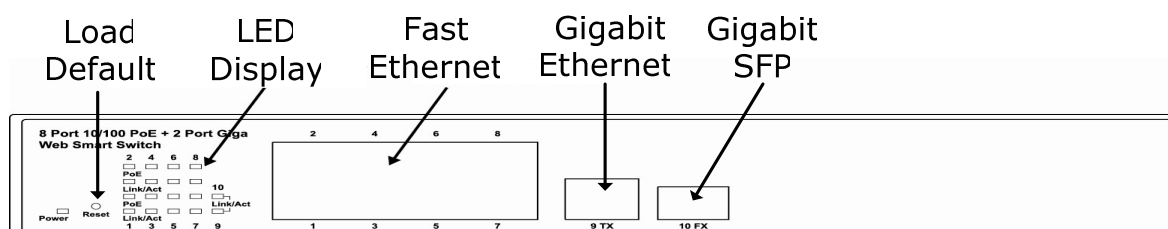


Note: The Gigabit Ethernet port and Gigabit SFP port can both work at the same time.

LED indicators on the switch:

LED	Color/Status	Description	No. of LED
Power	Amber On	Power on	Power
Link / ACT	Green On	Link Up	Port 1~8 (10/100 M)
	Green Blinking	Data activating	
PoE	Amber On	Port is linked to Power Device	
	Off	No Power Device is connected	
Link / ACT	Green On	Link Up	Port 9~10 (1000 M)
	Green Blinking	Data activating	

Connecting up to 8 GV-IP Cameras and 1 GV-DVR/NVR System

Through twisted pair cables, this switch can be connected to up to 8 GV-IP Cameras and 1 GV-NVR/DVR System. You can also extend the connections by connecting to other switches.

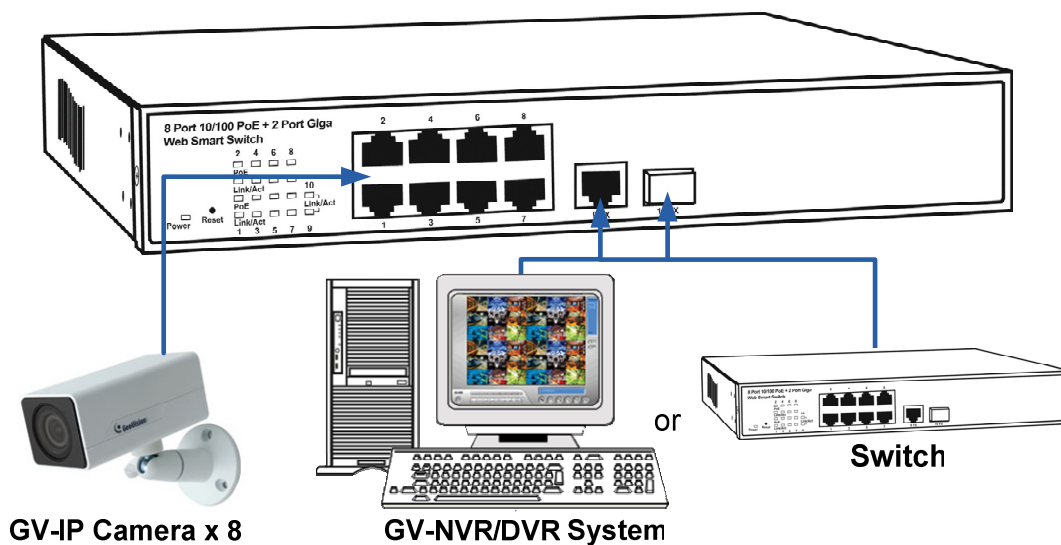

Note: The maximum cable length for Ethernet is 100 meters. For connection that exceeds 100 meters, you can use the Gigabit SFP port.

Accessing Web Interface

Users can log in the Web interface to manage and set up the switch. Follow the below steps to log in the Web user interface.


Note: The device has a default IP [\\192.168.0.250](http://192.168.0.250). The ID and Password to log in are **admin**.

1. To access the Web user interface, type the default IP [\\192.168.0.250](http://192.168.0.250) into your Web browser.
2. When the User Log In page appears, type the default ID and password **admin** and click **OK**.



The screenshot shows a web interface titled "USER LOG IN" in a blue header. Below the header, there is a form with the following fields: "Site:" with the value "192.168.0.250", "ID:" with an empty text input box, and "Password:" with an empty text input box. At the bottom of the form is a button labeled "OK".

3. When you successfully log in, the Main Page appears. Select the functions from the left menu to manage the switch.

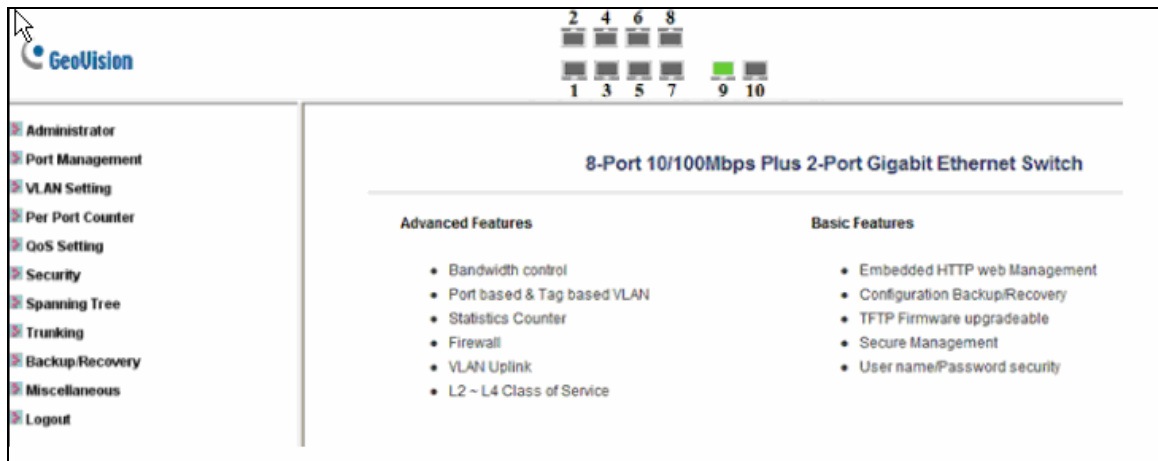


The screenshot shows the main page of the web interface. At the top left is the GeoVision logo. At the top right, there are port status indicators for ports 1 through 10, with ports 9 and 10 highlighted in green. The main content area is titled "8-Port 10/100Mbps Plus 2-Port Gigabit Ethernet Switch". Below the title, there are two columns of features: "Advanced Features" and "Basic Features".

Advanced Features	Basic Features
<ul style="list-style-type: none">• Bandwidth control• Port based & Tag based VLAN• Statistics Counter• Firewall• VLAN Uplink• L2 ~ L4 Class of Service	<ul style="list-style-type: none">• Embedded HTTP web Management• Configuration Backup/Recovery• TFTP Firmware upgradeable• Secure Management• User name/Password security


Configuring through GV-IP Device Utility

When connecting multiple GV-POE Switches in the LAN, you can use the **GV-IP Device Utility V8.6.0.0 or later** for quick access to the configuration of each connected GV-POE Switch. Currently, only the **GV-POE0801 / 1601 / 2401 of Firmware V1.02** are supported.

1. Install **GV IP Device Utility** from http://www.geovision.com.tw/english/5_8.asp.
2. Click the IP address of desired GV-POE Switch to display the available settings.

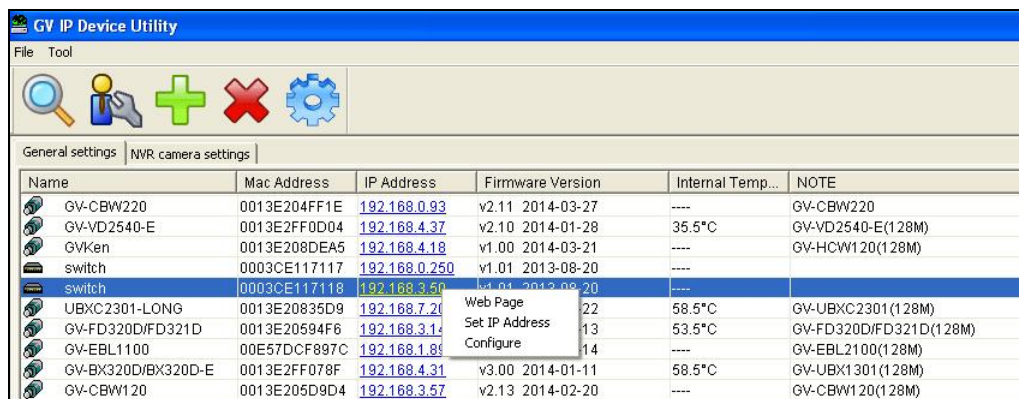

3. To access the Web interface of the switch, click **Web Page**.
4. To set up the IP address, subnet mask and default gateway of the switch, click **Set IP Address**.
5. To access the port connection status, click **Configure**. This dialog box appears.

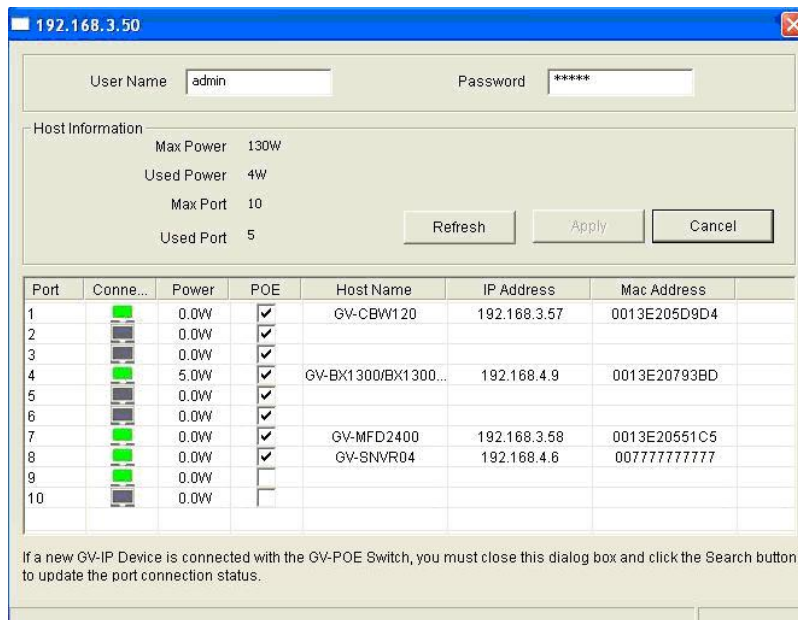

6. To enable the POE function for the connected GV-IP Device, click the check box in the POE column.
7. Click **Refresh** to retrieve the port information and **Apply** to allow the settings to take effect.

Note: If a new GV-IP Device is connected with the GV-POE Switch, you must close this dialog box and click the **Search** button to update the port connection status.

Loading Default Setting

You can load the default value with the **Reset** button or with the Web interface.


Hardware

1. Turn on the switch.
2. Press and hold the **Reset** button on the front panel of the switch for 5 seconds until all the LED start blinking.
3. Release the button. The switch is restored to its default settings.

Note: After restoring default settings, you will need to configure IP address, ID and Password again.

Web Interface

1. On the Web interface, open the **Administrator** tree list, and select **Load default setting**.

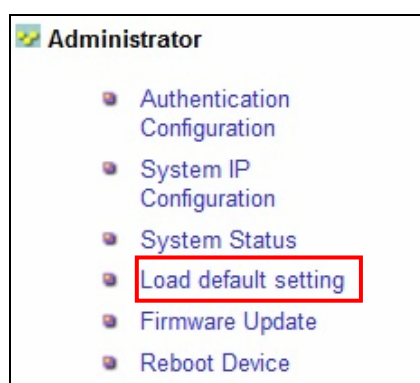

2. Click **Load** to restore the switch to the original configuration.


Note: Loading default from the Web interface will not change the user name, password and IP configuration. If you want to restore the default setting of IP address, user name and password, press the **Reset** button on the front panel of the switch.

Updating Firmware

1. On the Web interface, open the **Administrator** tree list, and select **Firmware Update**.




2. Type your password in the Password and ReConfirm fields. Click **Update**.

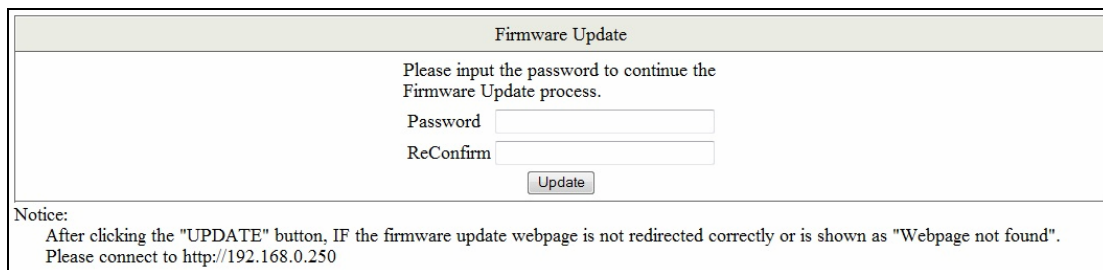


The screenshot shows a form titled 'Firmware Update'. It contains the following text: 'Please input the password to continue the Firmware Update process.' Below this are two input fields labeled 'Password' and 'ReConfirm', followed by an 'Update' button. A 'Notice' section at the bottom states: 'After clicking the "UPDATE" button, IF the firmware update webpage is not redirected correctly or is shown as "Webpage not found". Please connect to <http://192.168.0.250>'

3. When this message pops up, click **OK** to proceed the firmware updating procedure.

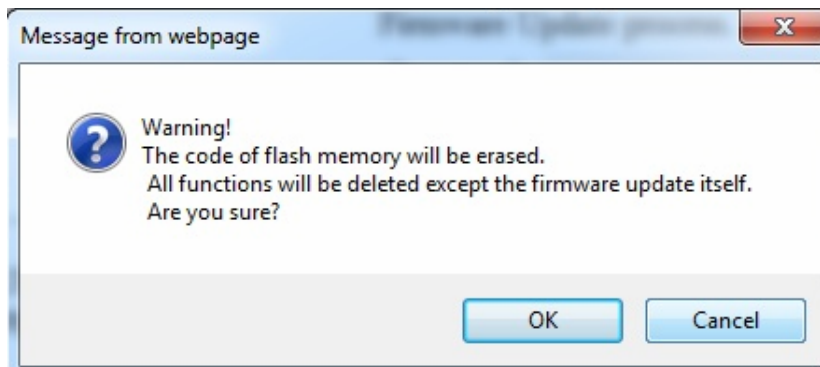

4. When this page appears, the flash memory of the switch is being erased.

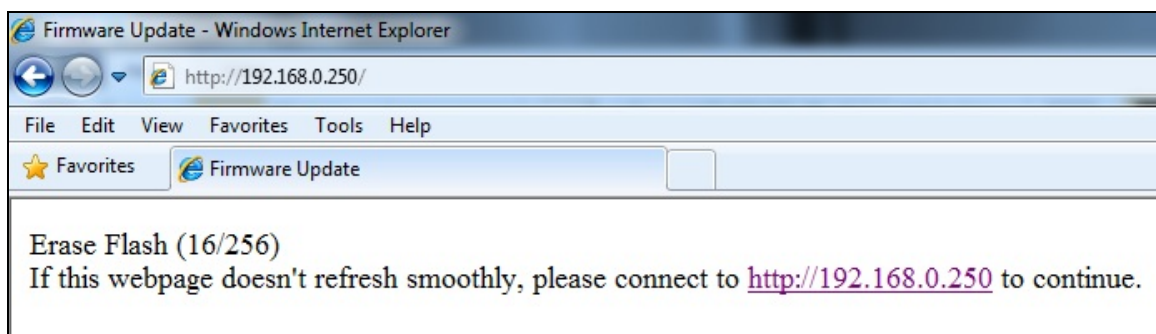

5. When this page appears, click **Browse** to select the latest firmware file (.bin) to update.

F/W	
Select the image file:	<input type="text"/> <input type="button" value="Browse..."/> <input type="button" value="UPDATE"/>
http://192.168.0.250	

6. Click **Update**. The uploading process is started.
7. After the firmware is successfully uploaded, the page shows OK. Click **Continue** to re-login the switch.

Specifications

Ports		
Number of Ports	10 ports 8-port Fast Ethernet 10/100BaseTX, IEEE 802.3at PSE 2-port Gigabit Uplink (1*TP, 1*SFP)	
Performance		
MAC Address	4 K	
Buffer Memory	2.75 M bits	
Transmission Method	Store and Forward	
Transmission Media	10BaseT Cat. 3, 4, 5 UTP/STP 100BaseTX Cat. 5 UTP/STP 1000BaseT Cat. 5/5E, 6 UTP/STP	
Filtering / Forwarding Rates	10 Mbps port - 14,880 pps 100 Mbps port - 148,800 pps 1000 Mbps port - 1,488,000 pps	
Smart Features		
Port Based VLAN	10	
Tagged Based VLAN	32, VID = 1~4094	
IGMP Snooping	V1 & V2	
Link Aggregation	1, Gigabit ports	
Quality of Service (QoS)	High & Low priority queues, 802.1p	
Security	Port & MAC binding, 3 MAC per port	
Port Management	Port State, Speed/Duplex, Flow Control Configuration, Port Mirroring, Bandwidth Control, Broadcast Storm Control, PoE	
Administrator Management	Web Management, Password Protection, Configuration Backup/Restore, Firmware Upgrade	
Mechanical Characteristics		
LED Indicators	Per Port: Link/Act PoE Act/Status Power	
Electrical Characteristics		
PoE Power	Input	100 ~ 240 V/AC, 50 ~ 60 Hz
	Output	IEEE 802.3at Compliant Voltage, Per Port Max. 30 watts (8 Ports at Full 15.4 W / 4 Ports at Full 30 W)
Max. Power Consumption	130 W	

General	
Dimensions (H x W x D)	44 x 266 x 160 mm (1.73 x 10.47 x 6.3")
Weight	1.8 kg (3.97 lb)
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20°C ~ 90°C (-4°F ~ 194°F)
Humidity	10% ~ 90% RH (non-condensing)
Standards and Regulatory	
Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.ab 1000BaseT IEEE 802.3z 1000BaseSX/LX IEEE 802.3x Flow Control IEEE 802.3ad Link Aggregation Control Protocol IEEE 802.1Q VLAN IEEE 802.1p Class of Service IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.3at Power Over Ethernet (PoE+)
Regulatory	CE, FCC Class A

Note: Specifications are subject to change without prior notice.