Arlington

Liquid-Tight, Concrete-Tight Zinc Fitting for PVC Jacketed MC & Teck 90



White grommet and washer for #10 cable LTMC50

LTMC50 INCLUDES...


Zinc, liquid-tight, concretetight fitting, black grommet and washer for #12 or #14 cable (ships installed), and white grommet and washer for #10 cable.



LTMC507





LTMC75



- Reduces inventory & saves cost of stocking several different fittings
- Fast and easy installation
- Ideal for parking decks
- Larger sizes accommodate widest cable range: 14/2 6/3

	UPC/DCI/NAED MFG #018997			UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LTMC50	04279	1/2″	.415565	25	100	2.221	1.310	1.300
LTMC507	16800	1/2″	.550730	25	25	2.603	1.680	1.188
LTMC75	16801	3/4″	.725865	25	25	2.648	1.680	1.350



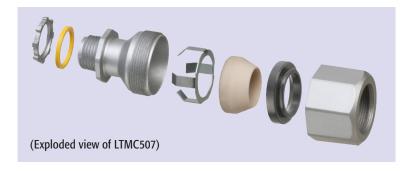

INSTALLATION INSTRUCTIONS (LTMC50) 1 2 3

LTMC50 ships ready to install on #12

- or #14 PVC jacketed MC cable. For installations on #10 cable, substitute the WHITE grommet and washer...it's FAST and EASY!
- 1. Remove sharp edges from end of MC cable, then cut 1-1/4" off the PVC jacket to prepare cable for installation of fitting.
- 2. Determine which grommet and washer combination to use (white for #10, black for #12 or #14). When assembled, push cable into fitting.
- 3. Cable installed in fitting. Tighten nut.
- 4. Install assembly in box.