



EN



LZR[®]-FLATSCAN 3D SW

SAFETY SENSOR
FOR AUTOMATIC SWING DOORS


User's Guide for software version SW 0100 and higher
(refer to tracking label on product)




INSTALLATION TIPS




Avoid vibrations.




Do not cover the laser window.




Avoid moving objects and light sources in the detection field.




Avoid the presence of smoke and fog in the detection field.



Avoid condensation.




Avoid exposure to sudden and extreme temperature changes.



Keep the sensor permanently powered in environments where the temperature can descend below -10°C.

MAINTENANCE TIPS




Clean the laser window with compressed air. If needed, wipe only with a soft, clean and damp microfibre cloth.



Do not use dry or dirty towels or aggressive products to clean the laser window.




Avoid direct exposure to high pressure cleaning.




The warranty is invalid if unauthorized repairs are made or attempted by unauthorized personnel.

SAFETY TIPS



The door control unit and the door cover profile must be correctly earthed.



Only trained and qualified personnel may install and setup the sensor.



Always test the good functioning of the installation before leaving the premises.



- The sensor cannot be used for purposes other than its intended use.
- The manufacturer of the door system incorporating the sensor is responsible for compliance of the system to applicable national and international regulations and safety standards.
- The installer must read, understand and follow the instructions given in this manual. Improper installation can result in improper sensor operation.
- The manufacturer of the sensor cannot be held responsible for injury or damage resulting from incorrect use, installation or inappropriate adjustment of the sensor.

DESCRIPTION




The **LZR®-FLATSCAN 3D SW** and **LZR®-FLATSCAN SW** are safety sensors for automatic swing doors based on laser technology. They secure the moving door wing as well as the hinge area.

To do so, a module must be installed in the upper corner of the door wing on both sides of the door.


FLATSCAN 3D SW

FLATSCAN SW

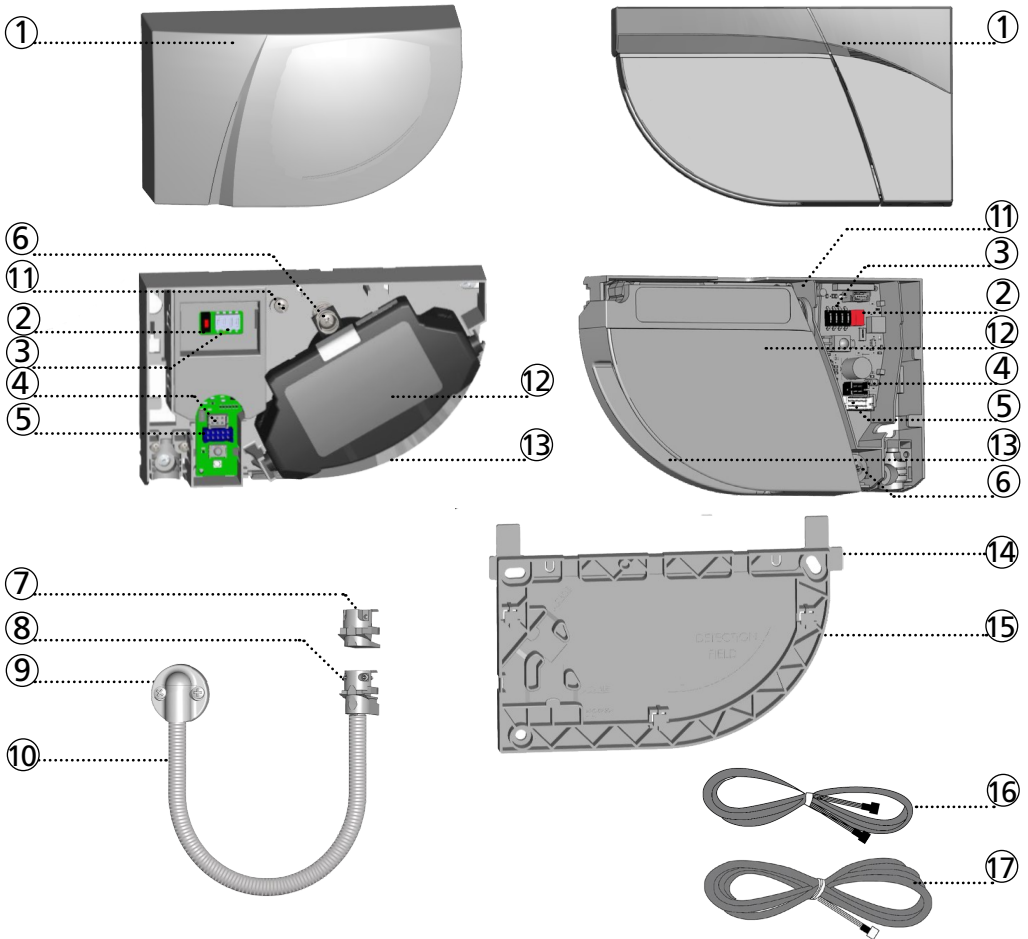

- | | | |
|-----------------------------|----------------------------------|--------------------------|
| 1. cover | 7. plug | 13. laser window |
| 2. push button | 8. clamp | 14. positioning aids |
| 3. DIP-switch | 9. cap and screws (flexible kit) | 15. mounting base |
| 4. MAIN-SECONDARY connector | 10. flexible tube | 16. MAIN-SECONDARY cable |
| 5. power connector | 11. lock screw | 17. power cable |
| 6. angle adjustment screw | 12. laser head | |


LED-SIGNALS

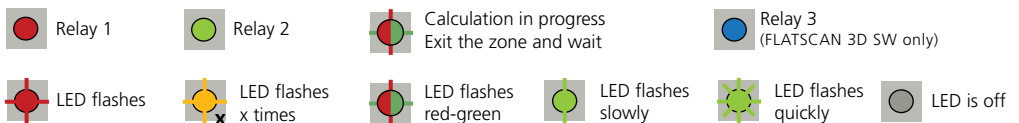


0 FOREWORD

The FLATSCAN 3D SW can be paired with another FLATSCAN 3D SW or a FLATSCAN SW. The installation steps are identical for both product versions. Used in combination with a FLATSCAN SW, the FLATSCAN 3D SW must be connected to the door controller to access all features (e.g opening functions).


1 MOUNTING ON DOOR

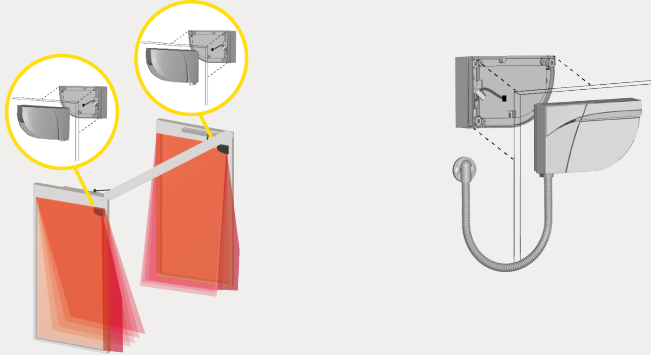

Keep a minimum distance of 15 cm between the FLATSCAN modules and radar sensors.

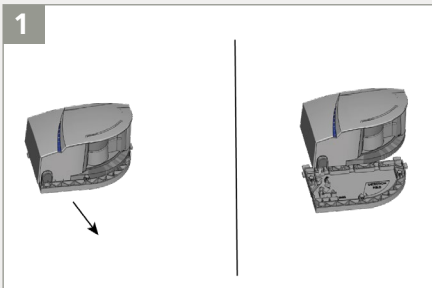


Slide the base off the sensor module.

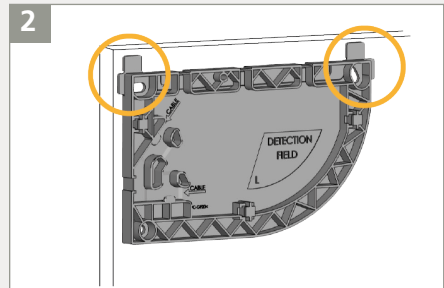


Take the base and put it on the door frame. The positioning aids help you to align the base correctly.



When mounting the base, make sure the sensor will not hinder the door movement. If the sensor isn't correctly positioned, it could be crushed during the opening of the door.

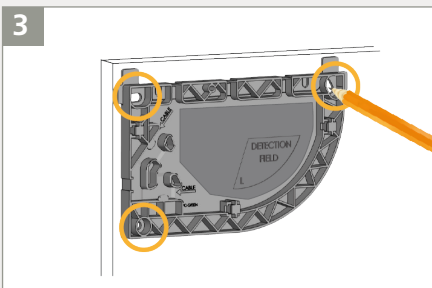


Using a pencil, mark the position of the holes to drill into the door frame. You can also use the inner surface of the base to fasten the screws.

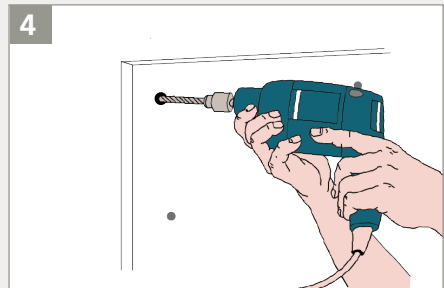


Remove the base and pre-drill the holes where marked.

5

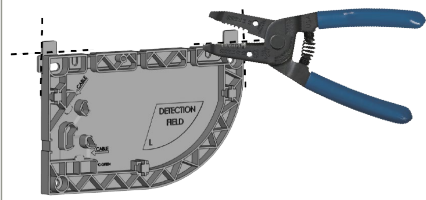


Using a wire cutter, remove the positioning aids from the base.

6




Fasten the 3 screws using a Pozidrive screwdriver. The base needs to be fixed firmly!

7

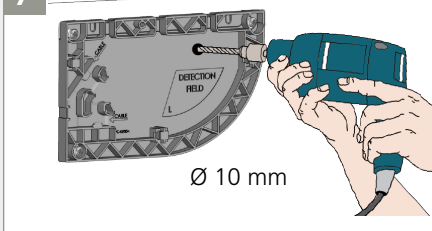


Drill through the 2 bases and the door using a 10 mm bit in order to pass the MAIN-SECONDARY cable. Soften the edges using a sheet of sandpaper.

8

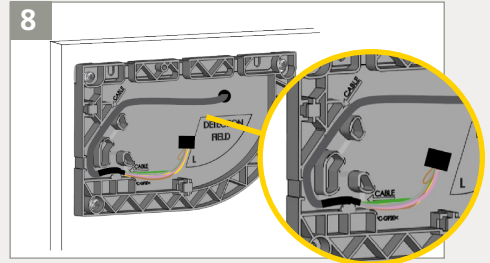


Take the MAIN-SECONDARY cable and pass it through the hole. Position the cable in the notch of the base and make sure it is firmly fixed.

9

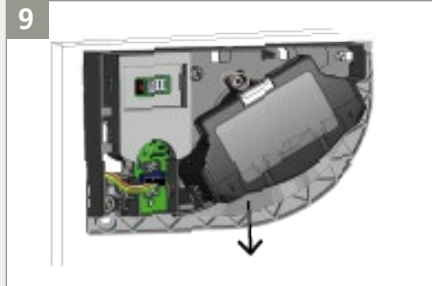


Pass the cable through the hole on the back of the sensor and fasten the sensor on the base.

10

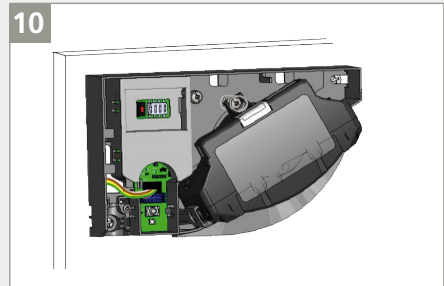


Connect the black plug to the black connector. Make sure that all wires are safely tucked within the notch to avoid crushing them with the cover.

11

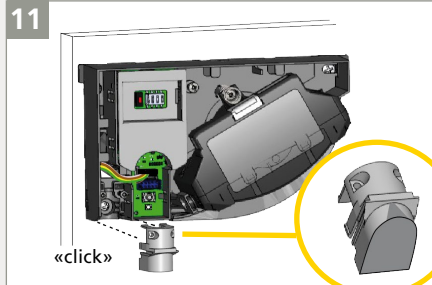

Close the sensor which will not be connected to the door controller using a plug.

12

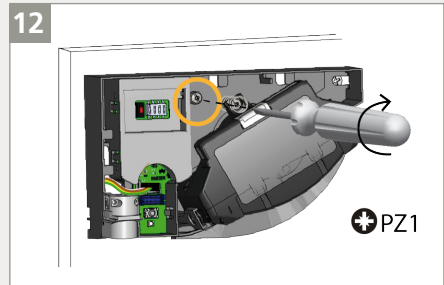


Fasten the lock screw firmly. **Mount the sensor securely**

⚙️ Sensor connected to other module = SECONDARY module.


2 WIRING TO DOOR CONTROLLER




We recommend connecting a FLATSCAN 3D SW to the door controller.

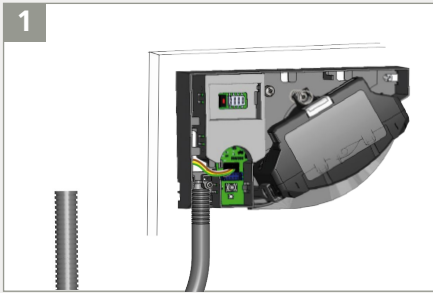


1 Take the flexible tube and determine how long it should be in order to reach the door controller.

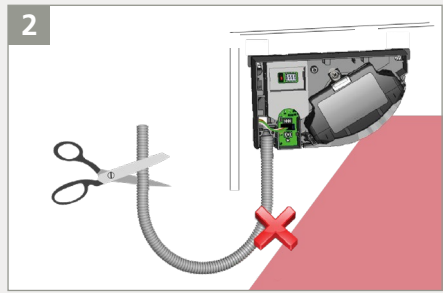


2 Cut the surplus to avoid undesired detections caused by the flexible tube.

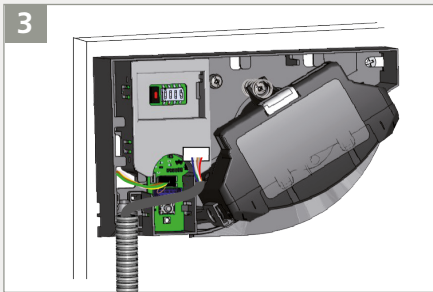


3 Pass the power cable through the flexible tube. Connect the white plug to the white connector.


 Sensor connected to door controller = MAIN module.

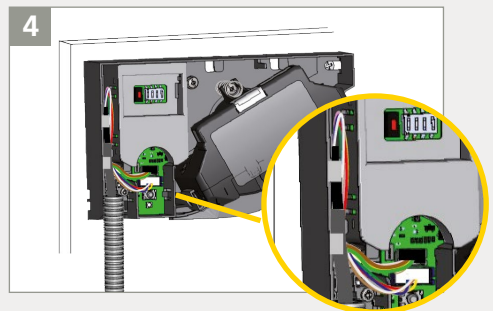

4 Make a loop with the wires of the power cable and pass them through the notch as indicated. Use the other part of the cable to block the wires.

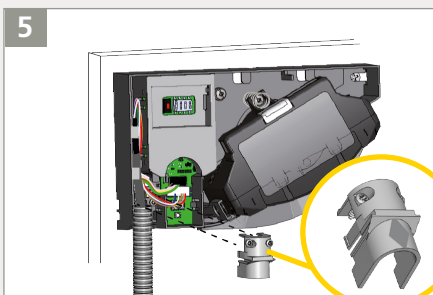


5 Take the clamp to fix the flexible tube to the sensor. Fasten the 2 screws firmly in order to avoid pulling out the cable.

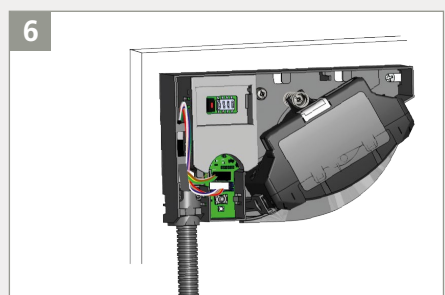

6 Tighten the other side of the flexible tube using the cable cap and pass through the rest of the power cable towards the door controller.


3 WIRING : CABLES

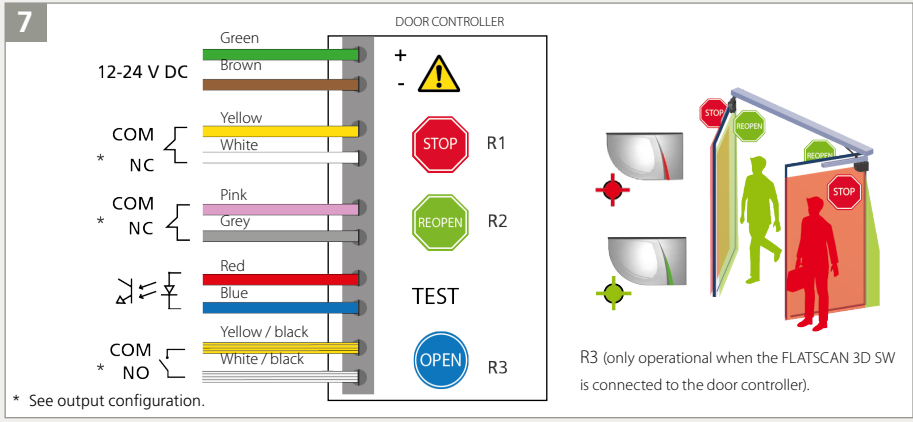


Cut the power cable to the right length, strip the 10 wires and connect all wires as indicated. The polarity of the power supply is important. For compliance with EN 16005 and DIN 18650, connection to door controller test output is required.

4 DIP SWITCH 1



Make sure the setting of DIP 1 is correct on all modules according to the door side.

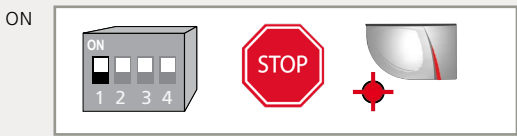

RELAY 1: STOP-impulse on the opening side of the door.

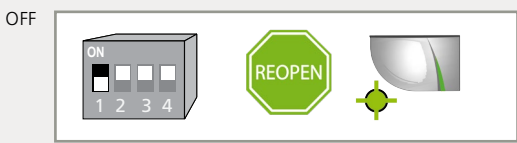

RELAY 2: REOPENING-impulse on the closing side of the door.

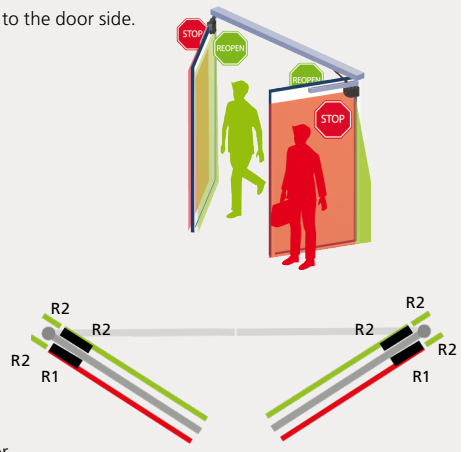

After changing a DIP-switch, the orange LED flashes. A LONG push on the push button confirms the settings. Afterwards, a number of green flashes (x) indicates the number of connected modules.

> 3 sec.

5 TEACH-IN



Before launching a teach-in, make sure that:

- **glass surfaces near the door are covered**

- the door controller is set up first

- the door is closed (use the service mode if needed)

- the door controller is connected to all relay outputs and is fully reacting to them


- the MAIN-SECONDARY cable is connected between the modules

- the detection field is free of snow buildups, heavy rain, snowfall, fog or other objects or people

- the laser window protection is removed (for FLATSCAN SW).

1. To launch a teach-in, press the push button of the MAIN* module briefly. The LED starts to flash red-green quickly. When installing the sensor on a double swing door, repeat this on the other MAIN module.
2. Wait until all main modules flash green. Position yourself in front of the door and stretch out your arm in front of you. Make an up and down movement at closing edge level in order to mark the limit of the detection zones. The LED flashes red while calculating the width of the door wings.
3. Wait until all main modules flash green again. The Flatscan 3D SW will open the door to learn the environment (if the opening relay has been connected to the door controller). If the door doesn't open you can activate a door opening. **Make sure you are way outside of the detection field** (min. 2 m from the door). During the closing of the door, the sensor flashes red.
4. Once the door is completely closed again and the LED is off, the teach-in is completed.

* A teach-in on the MAIN module configures both the MAIN and the SECONDARY modules. A teach-in on the SECONDARY module only configures the SECONDARY module. In case the MAIN and SECONDARY modules are not aligned (same height or same distance from the hinge), first launch a teach-in on the MAIN and then on the SECONDARY module.

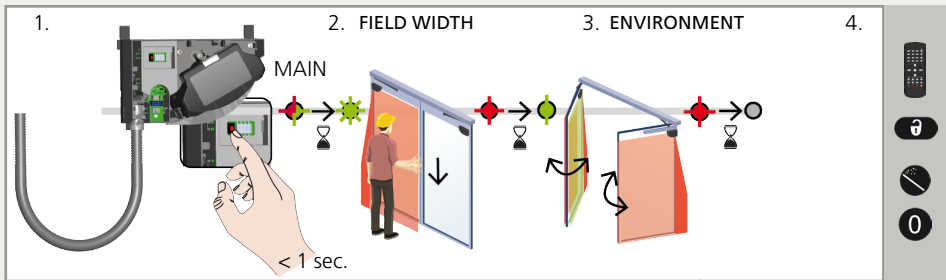


Launch a new teach-in each time the sensor tilt angle is changed or new objects are added to/changed in the detection zone.

6 TESTING AND ADJUSTING



Check the correct positioning of the safety fields by placing an object in the detection field.

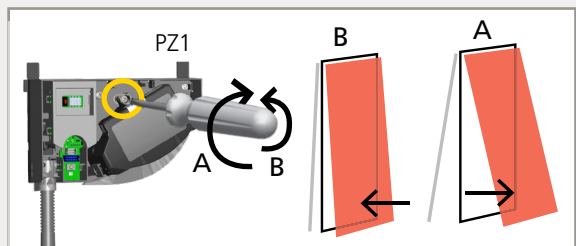

If necessary, adjust the tilt angle of the laser curtain by turning the tilt angle adjustment screw (from 0° to 5°).




After changing the angle, the sensor position or the environment, always launch a teach-in and test the correct positioning of the detection fields.

7 VIRTUAL OPENING BUTTONS (FLATSCAN 3D SW only)


If needed, you can add virtual opening buttons (max. 2) in the second curtain. They can be used as activation zones to open the door manually, and can also be placed outside of the safety zones. To operate, the FLATSCAN 3D SW must be connected to the door controller with the cable provided (10 strands).

When the green LED flashes, hold your hand in the desired position to learn the virtual opening button. The LED flashes red to confirm the teach-in. Remove your hand: when the LED flashes green you can either learn another virtual opening button or wait 10 sec. until the end of the teach-in.

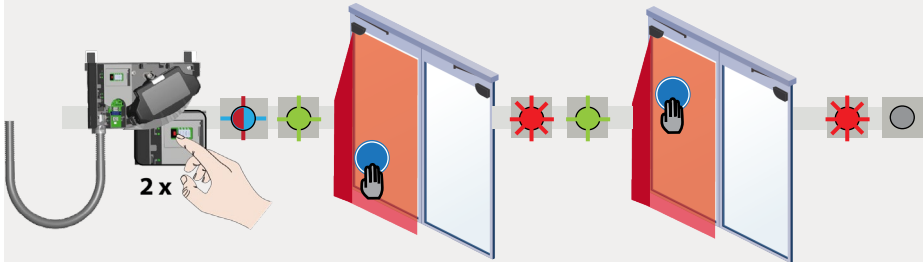


8 FINAL STEPS

CLOSING



Close the cover starting on the narrow side. Do not hesitate to push.

OPENING

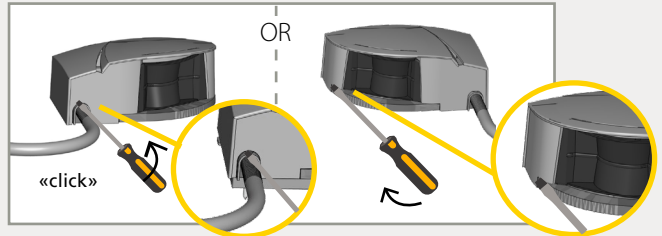


To open the sensor again, position a screwdriver in the notch and pull until the cover comes loose.

EDGE ZONE (FLATSCAN 3D SW ONLY)


The FLATSCAN 3D SW provides an edge zone safeguarding the leading edge of the door leaf while the door is closing. The edge zone is activated when the door leaf is almost closed and aims to increase the protection of hands and fingers.


Note : the edge zone must be adjusted according to the door type (cf. edge zone presets p. 10). For the edge zone to be fully operational, make sure relay 3 (OPEN) is connected to the door controller.

Double leaf

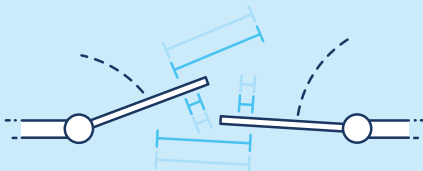


Single leaf

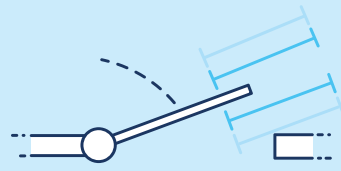









DIP-SWITCH SETTINGS (OPTIONAL)



In order to adapt these parameters by remote control, set the corresponding DIP switch to ON.

DIP	ENVIRONMENT	ON	OFF	Notes
DIP 2	ENVIRONMENT	standard	critical	Switch to CRITICAL when external disturbances are likely to cause unwanted detections (min. obj size and immunity are increased).
DIP 3	BACKGROUND	on	off	Switch to OFF when there is no background (glass floor, footbridge...). 
DIP 4	HINGE ZONE	on	off	Switch to OFF when the hinge area does not need to be secured and objects can cause unwanted detections.


    

ORANGE GREEN X OFF

After changing a DIP-switch, the orange LED flashes. A LONG push on the push button confirms the settings. Afterwards, a number of green flashes (x) indicates the number of connected modules.

REMOTE CONTROL SETTINGS (OPTIONAL)

DIMENSIONS OF ZONES

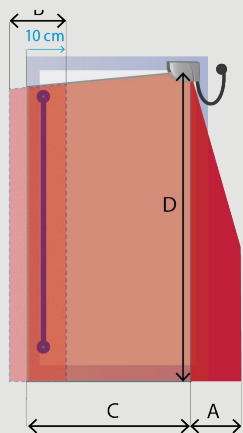

Width of the hinge zone

A ↔ 000 001 - 100

no field 001 - 040 100*

The width of the hinge zone should be set to min 40 cm to efficiently secure the hinge area according to EN 16005 and DIN 18650.

The actual dimensions depend on the mounting height (100 cm at 4 m). In order to change these settings by remote control, adjust DIP-switch 4 to ON.

Width of the edge zone

B ↔ 000 001 - 100

no field 001 - 005 100 cm

Width of the door zone

C ↔ 000 001 - 400

no field 001 - 400 cm

Height of all zones

D ↔ 000 001 - 400

no field 001 - 400 cm


C and D : a teach-in overwrites these values automatically.

EDGE ZONE PRESETTINGS

3	4	5	6
No edge zone	Single leaf	Double leaf - first leaf to close	Double leaf - second leaf to close

This presetting is mirrored to the other connected FLATSCAN 3D SW (from MAIN to SECONDARY and SECONDARY to MAIN).

OUTPUT CONFIGURATION



2 2 1


R1 R2 R3

1 NO (Normally open)

2 NC (Normally closed)

Always enter 3 digits for output parameters:

- 1st digit refers to the Output 1 (R1)
- 2nd digit refers to the Output 2 (R2)
- 3rd digit refers to the Output 3 (R3).



UNCOVERED ZONE



F2	1	2	3	4	5	6	7	
	2	4	6	8	10	12*	14*	cm**

Increase in case of snow, dead leaves, etc.

*These settings do not allow hinge zone compliance to EN16005 / DIN18650 in environments where crawling children may be present (e.g. kindergarten).

**Measured in specific conditions and dependant on application and installation.

BACKGROUND / ANTIMASKING

In order to change these settings by remote control, adjust DIP-switch 3 to ON.

	0	1	2	3	
ANTIMASKING	OFF	OFF	ON	ON	
BACKGROUND	OFF	ON	OFF	ON	

Antimasking: protective function which detects an unwanted object nearby the laser window masking the vision field. Background: reference point in the detection field of the sensor. If no background is present, switch to off.

SAFETY FIELD DEPTH

	1	2	3	4
	1 curtain	2 curtains	3 curtains	4 curtains

For hinge zone compliance to EN 16005/ DIN 18650 at the top of the hinge, set the safety field depth to min. 3 curtains for sensors installed below 2.3 m and 4 curtains for sensors installed below 2 m. On the REOPEN side: During the opening cycle, the sensor always extends the safety depth up to 4 curtains to cover the whole door pathway.

OPENING FIELD *

* only available with the new BEA remote control.

	0	1	2	3	4
	OFF				
		1 curtain	2 curtains	3 curtains	4 curtains

OPERATING MODE

	1	2	3
	STATIC	AUTO	MAN.

AUTO - The Flatscan, when operating, is

- in dynamic operation when using two interconnected modules
- in static operation when using a single module


In **dynamic operation**, the Flatscan dynamically adapts its detection fields according to the door position to fit the environment. An expanded field and wall masking are possible.

In **static operation**, the detection field remains unchanged regardless of the door position. If opening against a wall, the door controller must be set accordingly to ignore it.

STATIC - This mode can be chosen to force static operation.

MAN - This mode is used for manually operated automatic doors. The Flatscan is in dynamic operation and the reopening and opening signals are set on the hinge zone while the door is closing. Two modules must be interconnected to use this mode.

FACTORY VALUE



DIP-SWITCH SETTINGS (OPTIONAL)



In order to adapt these parameters by remote control, set the corresponding DIP switch to ON.

	ON	OFF	
DIP 2 ENVIRONMENT	standard	critical*	Switch to CRITICAL when external disturbances are likely to cause unwanted detections (min. obj size, immunity and uncovered zone are increased).
DIP 3 BACKGROUND	on	off	Switch to OFF when there is no background (glass floor, footbridge...).
DIP 4 HINGE ZONE	on	off	Switch to OFF when the hinge area does not need to be secured and objects can cause unwanted detections.

* Make a risk analysis to check if the environment requires an additional mechanical protection in the hinge area.

ORANGE

 GREEN
 OFF

After changing a DIP-switch, the orange LED flashes. A LONG push on the push button confirms the settings. Afterwards, a number of green flashes (x) indicates the number of connected modules.


REMOTE CONTROL SETTINGS (OPTIONAL)



↔ 000 001 - 400 cm
 no field 001 - 400

↔ 000 001 - 400 cm
 no field 001 - 400

A teach-in overwrites these values automatically.

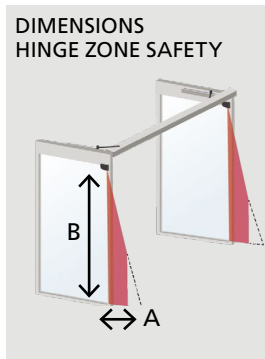


In order to change these settings by remote control, adjust DIP-switch 4 to ON.

↔ 000 001 - 100 cm
 no field 001 - 100* 040

↔ 000 001 - 400 cm
 no field 001 - 400

* The actual dimensions depend on the mounting height (100 cm at 4 m).
 A teach-in overwrites these values automatically.

OUTPUT CONFIGURATION



		1	2	3	4		
	R1	NO	NC	NC	NO	NO	NC
	R2	NC	NO	NC	NO	NO	NC

	NO	NC
NO POWER		
NO DETECTION		
DETECTION		

NO = normally open
NC = normally closed.

IMMUNITY FILTER

In order to change these settings by remote control, adjust DIP-switch 2 to ON.

	1	2	3	4	5	6	7	8	9
	low	>	>	>	>	>	>	>	high

Increase to filter out external disturbances.
The reaction time increases significantly between value 5 and 9.

UNCOVERED ZONE



In order to change these settings by remote control, adjust DIP-switch 2 to ON.

F2	1	2	3	4	5	6	7	8	9	
	2	4	6	8	10	12	14	16	18	cm*

Increase in case of snow, dead leaves, etc.
* measured in specific conditions and dependant on application and installation.

ANTIMASKING & BACKGROUND

In order to change these settings by remote control, adjust DIP-switch 3 to ON.

	0	1	2	3	
ANTIMASKING	OFF	OFF	ON	ON	
BACKGROUND	OFF	ON	OFF	ON	

Antimasking: protective function which detects an unwanted object nearby the laser window masking the vision field.
Background: reference point in the detection field of the sensor.
If no background is present, switch to off.

FACTORY VALUE

HOW TO USE THE REMOTE CONTROL



After unlocking, the red LED flashes and the sensor can be adjusted by remote control.



If the red LED flashes quickly after unlocking, you need to enter an access code from 1 to 4 digits. If you do not know the access code, **cut and restore the power supply**. During 1 minute, you can access the sensor without introducing any access code.



To end an adjustment session, always lock the sensor.



It is recommended to use a different access code for each module in order to avoid changing settings on both modules at the same time.

SAVING AN ACCESS CODE

The access code is recommended for sensors installed close to each other.




DELETING AN ACCESS CODE



Enter the existing code.

ADJUSTING ONE OR MORE PARAMETERS



CHECKING A VALUE



x = number of flashes = value of the parameter.

2x 1x 3x 1x 5x = field width: 2.35 m.


RESTORING TO FACTORY VALUES




Factory reset of all values.

Factory reset of all values except field dimensions and output configurations.

FLATSCAN 3D SW

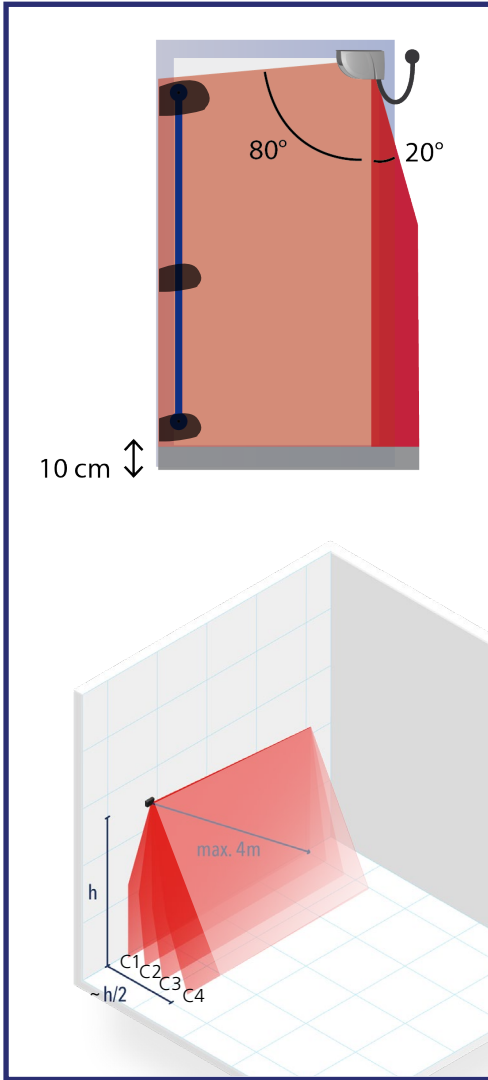

FLATSCAN SW

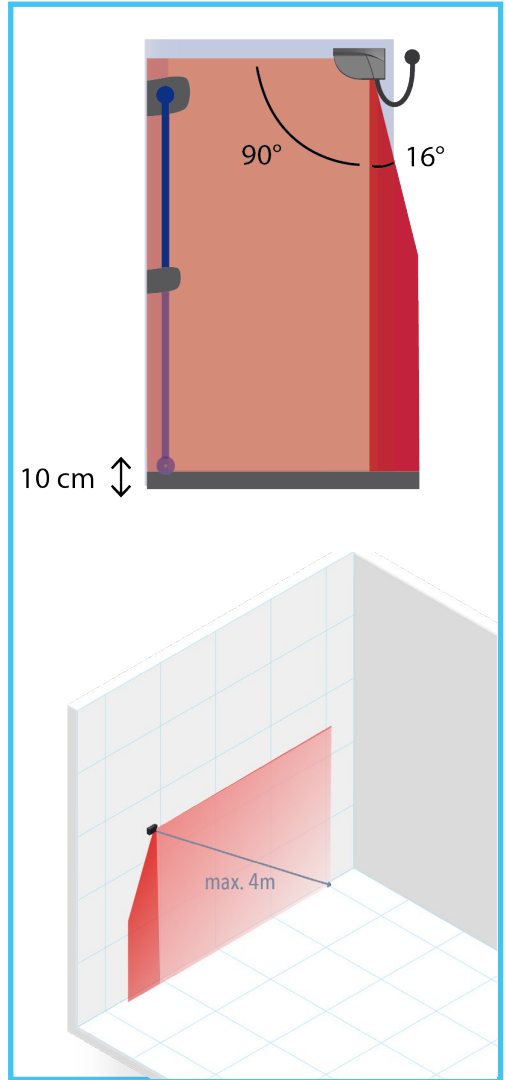

DOOR WING SAFETY


HINGE ZONE SAFETY

UNCOVERED ZONE
Adjustable by remote control
factory value: 10 cm.

Check the detection fields using our online sizer tool:
<https://eu.beasensors.com/sizer/flatscan/>



SERVICE MODE



The service mode deactivates all outputs during 15 minutes and can be useful during an installation, a mechanical teach-in of the door or maintenance work.

To enter the service mode, push on the button for > 3 seconds.
When the sensor is in service mode, the LED is off.
To exit the service mode, push again for > 3 seconds.

The service mode is deactivated automatically when launching a teach-in.













TROUBLESHOOTING



In case of unwanted reactions of the door, verify whether the problem is caused by the sensor, the door controller or a radar sensor in proximity. To do so, activate the service mode (no safety) and launch a door cycle. If the door cycle is completed successfully, check the sensor. If not, verify the door controller, the wiring or a radar sensor.

Keep a minimum distance of 15 cm between the FLATSCAN modules and radar sensors or use the LZR®-FLATSCAN Protective cover to avoid unwanted reactions of the door.

	The RED, GREEN or BLUE LED is ON sporadically or permanently and the door does not react as expected.	Bad teach-in.	Launch a new teach-in (closed door).
		Unwanted detections (due to environment or external conditions).	1 Make sure the flexible cable does not cause detections.
			2 Verify if the laser window is dirty and clean it with compressed air. Then wipe it carefully with a damp and clean microfibre cloth if necessary (attention: the surface of the laser window is delicate).
			3 Launch a new teach-in (closed door).
4 Switch DIP 2 to off (critical environment).			
	The sensor does not react at power-on.	Inverted power supply.	Check wiring (green +, brown -).
		Faulty cable.	Replace cable.
		Faulty sensor.	Replace sensor.
The sensor does not react when powered.	Test error.	Check voltage between red and blue wires.	
		Press the push button during at least 3 seconds to exit the service mode.	
Opening function does not react at power on.	The opening function is deactivated during 30 seconds at power on.	Wait 30 seconds.	
	It is not possible to adjust a setting by remote control.	Wrong DIP-switch position.	Adjust the required DIP-switches to ON.
	The remote control does not react.	The sensor is protected by a password.	Enter the right password. If you forgot the code, cut and restore the power supply to access the sensor without entering a password during 1 minute.

	The ORANGE LED is on permanently.	The sensor encounters a memory problem.		Send the sensor back for a technical check-up.	
	The ORANGE LED flashes quickly.	DIP-switch setting awaiting confirmation.		Confirm the DIP-switch setting: long push on the push button.	
	The ORANGE LED flashes 1 x every 3 seconds.	The sensor signals an internal fault.		Cut and restore power supply. LED flashes again, replace sensor.	
	The ORANGE LED flashes 2 x every 3 seconds.	Power supply is out of limit.	1	Check power supply (voltage, capacity).	
			2	Reduce the cable length or change cable.	
		Internal temperature is too high.		Protect the sensor from any heat source (sun, hot air...).	
	The ORANGE LED flashes 3 x every 3 seconds.	Communication error between modules.	1	Check wiring between MAIN and SECONDARY modules.	
			2	Check wiring between interface card and laser head.	
			3	Press the push button during 3 seconds if the MAIN-SECONDARY cable is permanently removed.	
	The ORANGE LED flashes 4 x every 3 seconds.	The sensor does not see its background. Something close to the sensor is masking part of the detection field.		Turn off DIP 3 (deactivate background).	
			1	Make sure the laser window is not scratched. If it is, replace sensor.	
			2	Remove all masking elements (insects, spider web, flexible tube, window protection).	
			3	Verify if the laser window is dirty and clean it with compressed air. Then wipe it carefully with a damp and clean microfibre cloth if necessary (attention: the surface of the laser window is delicate)	
			4	Switch antimasking setting to off (attention: no conformity to DIN 18650 or EN 16005).	
	The ORANGE LED flashes 5 x every 3 seconds.	Teach-in error.	1	Check whether all teach-in requirements are fulfilled (see page 8) and launch a new teach-in (closed door).	
			2	Adjust the tilt angle of the laser curtain and launch a new tach-in (closed door).	
			3	Adjust the field dimensions by remote control. Push  and activate a door opening (step 3 of teach-in).	
			Permanent faulty measurements of door position.	1	Launch a new teach-in (closed door).
				2	If orange LED flashes again, contact BEA.
	The ORANGE LED flashes 6 x every 3 seconds.	Sporadic faulty measurements of door position.	1	Clear field and wait until the door closes.	
			2	If the door does not close, cut power supply and restore it once the door is fully closed.	
			3	Launch a new teach-in (closed door).	

TECHNICAL SPECIFICATIONS

FLATSCAN 3D SW

FLATSCAN SW

Technology	LASER scanner, time-of-flight measurement	LASER scanner, time-of-flight measurement
Detection mode	Presence	Presence
Max. detection range	4 m (diagonal) with reflectivity of 2% (i.e. : at W = 1.5m -> max. H = 3.7 m)	4 m (diagonal) with reflectivity of 2% (i.e. : at W = 1.5m -> max. H = 3.7 m)
Field of view	Door wing safety: 80° / Hinge zone safety: 20°	Door wing safety: 90° / Hinge zone safety: 16°
Resolution	Curtain 1 : 500 spots (0.2° between spots) Curtain 2 : 100 spots (1° between spots) Curtain 3 : 60 spots (1.7° between spots) Curtain 4 : 40 spots (2.5° between spots)	Door wing safety: 70 spots (1.3° between spots) Hinge zone safety: 100 spots (0.2° between spots)
Typ. min. object size	2cm @4m in curtain C1	Door wing safety :10 cm @ 4m (in proportion to object distance, DIP 2 = ON) Hinge zone safety : 2 cm @ 4m (in proportion to object distance, DIP 2 = ON)
Testbody	700 mm × 300 mm × 200 mm (testbody CA according to EN 16005 & DIN 18650)	700 mm × 300 mm × 200 mm (testbody CA according to EN 16005 & DIN 18650)
Optical characteristics (IEC/EN 60825-1:2014)	IR LASER: wavelength 905 nm; output power < 0.1mW; Class 1	IR LASER: wavelength 905 nm; output power < 0.1mW; Class 1
Supply voltage*	12 - 24 V DC ± 15 %	12 - 24 V DC ± 15 %
Power consumption	< 2 W	≤ 2 W
Response time	Typ. <120 ms / Max. 220 ms (curtain 2)	Door wing safety: max. 50 ms / Hinge zone safety: max. 90 ms
Output* Max. switching voltage Max. switching current	3 electronic relays (galvanic isolation - polarity free) 42V DC/AC peak 100 mA	2 electronic relays (galvanic isolation - polarity free) 42V DC/AC peak 100 mA
LED-signals	1 RGB LED: detection/output status	1 bi-coloured LED: detection/output status
Dimensions	145 mm (L) × 88 mm (H) × 60 mm (D) (mounting base + 7 mm)	142 mm (L) × 85 mm (H) × 33 mm (D) (mounting base + 7 mm)
Material - Colour	PC/ASA - Black - Aluminum - White	PC/ASA - Black - Aluminum - White
Tilt angles	0° to +5°	+2° to +10°
Protection degree	IP44 (IEC/EN 60529)	IP54 (IEC/EN 60529)
Temperature range	-25°C to +60°C	-30°C to +60°C if powered
Humidity	0-95 % non-condensing	0-95 % non-condensing
Vibrations	< 2 G	< 2 G
Min. door wing speed	2°/sec	2°/sec
Conformity	EN 12978; EN ISO 13849-1 Pl "d"/ CAT2; EN 62061 SIL 2; DIN 18650-1; EN 16005.	EN 12978; EN ISO 13849-1 Pl "d"/ CAT2; EN 62061 SIL 2; DIN 18650-1; EN 16005.

* External electrical sources must be within specified voltages, max 15W and ensure double insulation from primary voltages.

Specifications are subject to change without prior notice.
All values measured in specific conditions and with a specific temperature of 25°C.

BEA SA | LIEGE Science Park | ALLÉE DES NOISIETIERS 5 - 4031 ANGLEUR (BELGIUM) | T +32 4 361 65 65 | F +32 4 361 28 58 | INFO-EU@BEASENSORS.COM



BEA hereby declares that this product is in conformity with European directives :
2014/30/EU (EMC), 2006/42/EC (Machinery) and 2011/65/EU (RoHS).
The complete declaration of conformity is available on our website.
EC-type examination certificate from TÜV NORD CERT : 44 205 13089634.



This product should be disposed of separately from unsorted municipal waste.



WWW.BEASENSORS.COM