



8 CHANNEL 5MP TITANIUM NETWORK VIDEO RECORDER

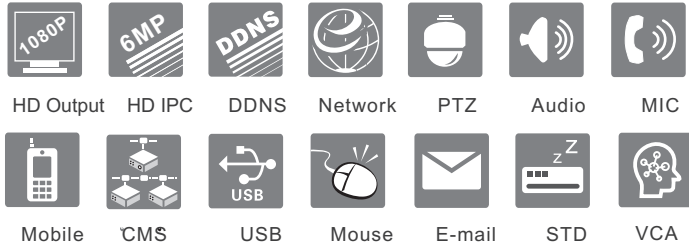

Main Feature:

- Support 8 CH 5MP/4MP /3MP/1080P/ 720P IP input
- Adopt standard H.265 and H.264high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
Playback : 8 CH simultaneously playback
- Search: time slice, time, event (manual, sensor, motion), tag search
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol, IE browse and CMS supported Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log review and device status review
- 1080P HD output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

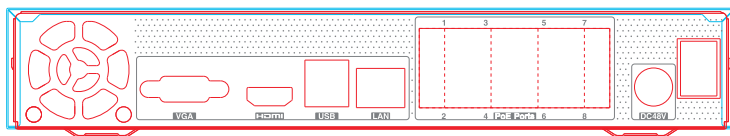

Specification:

Model	ED9308H5NV-8P-L	
System	Compression	Standard H.265, H.264
	OS	Embedded Linux
Video	Network Input	8 CH IPC input
	Network Access Bandwidth	64Mbps
	Network Access Format	5MP/4MP/3MP/1080P/960P/720P@25 / 30fps
	Output	HDMI × 1 : 1920×1080/1280×1024/1024×768 VGA × 1 : 1920×1080/1280×1024/1024×768
Audio	Network Input	8 CH IPC audio input
	2-way Audio	No
	Local Output	No (HDMI supports the audio output)
Record	Record Stream	Dual stream recording
	Resolution	5MP / 4MP / 3MP / 1080P / 960P / 720P @25 / 30fps
	Mode	Manual, timer, motion, sensor
Playback	Simultaneous Playback	Max 8 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
Alarm	Function	Play, pause, FF, FB, digital zoom, etc.
	Mode	Manual, sensor, motion, exception
	Input	No
	Output	No
Network	Triggering	Record, snap, preset, e-mail, etc.
	Interface	RJ45 100 Mbps × 1
Mobile Device	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	OS	iOS, Andriod
Storage	HDD	SATA × 1, up to 8TB per HDD
	Local Backup	U disk, USB mobile HDD
Backup	Network Backup	Yes
	USB	USB 2.0 × 2
Port	Remote Controller	Optional
	Power Supply	DC12V/1.5A
Others	Consumption	≤ 6W (without HDD)
	Dimensions (mm)	255 × 233 × 42 (W × D × H)
	Work Environment	-10 ~ 50 , 10% ~ 90% humidity

Physical Interfaces:

