




## HID Signo Biometric Reader 25B

*The HID Signo Biometric Reader can reliably read fingerprints of all types, including those that are hard-to-read due to the following conditions:*

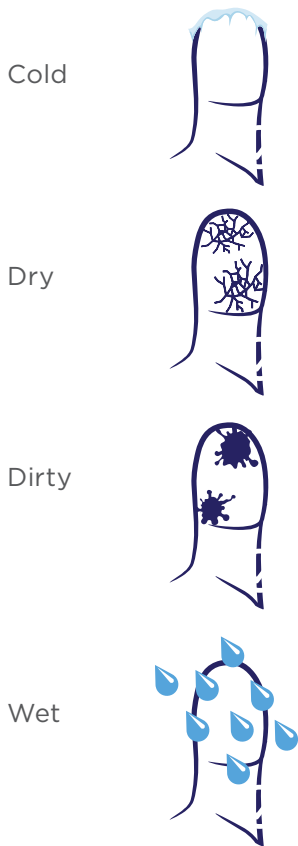

### DESIGNED FOR REAL-WORLD PERFORMANCE

- **Highly versatile** – Unmatched flexibility to deploy multiple authentication modes, including biometric fingerprint and contactless physical and mobile credentials, with a single reader platform.
- **Unparalleled performance** – Ultimate biometric fingerprint match reliability with patented multispectral imaging sensor that reads the subdermal layer of the skin for better accuracy.
- **Connected to the future** – Easily configure and manage in the field with HID Biometric Manager or API integration, including support for software upgrades over the network.

The HID® Signo™ Biometric Reader is designed for “real-world” applications, where people have wet, dry, dirty or worn fingerprints. This is where the reader comes into a class of its own — capturing and reading fingerprints that other devices cannot.

With HID Global’s patented multispectral imaging technology, the device captures fingerprint images from both the surface and the sub-surface, thereby delivering consistent read performance regardless of environmental and skin conditions. Industry-leading liveness detection capabilities also prevent spoof attempts leveraging fake fingers or latent fingerprints.

Safeguard against costly vulnerabilities with end-to-end security for each user’s biometric data. Biometric images are converted into a “template” (a string of data), meaning no image of the fingerprint is ever saved. Templates stored on the device or server are then also encrypted with AES-256.

The HID Signo Biometric Reader supports a variety of popular contactless credential

technologies including Seos®, iCLASS SE®, iCLASS®, MIFARE DESFire, MIFARE Classic and HID Mobile Access® virtual credentials. Each device supports Near Field Communication (NFC) and Bluetooth out of the box.

This device is paired with the web-based HID Biometric Manager software that performs configuration and management of the reader, including firmware updates over the network. In addition, the software enables enrollment of user’s fingerprint credentials for use with the different biometric authentication modes 1:1 verification and 1:N identification.

#### Door Controller Capabilities

Save on installation costs with built-in door access controller functionality. This enables the deployment of an intelligent and powerful edge-based biometric solution that supports local access authorization and door control functions. The device is also capable of supporting a downstream reader for secure egress via OSDP connection.

#### Highly Versatile

- Supports 1:N biometric authentication and template on card
- Enables mobility with native Bluetooth and NFC support
- On-Prem RESTful API along with a developer environment and tool set to accelerate time to market

#### Unparalleled Performance

- Patented multispectral imaging technology
- Native OSDP secure channel capability
- Robust outdoor performance with an IP67 rating and IK9 impact rating

#### HID Biometric Manager

- Select your authentication mode + enable and disable credential compatibility
- Load Elite and mobile keys in the field
- Securely enroll users and encode templates on card

## SPECIFICATIONS

|  |  |
|--|--|
| <b>Model Number</b>  | <b>25B</b>   |
| <b>13.56 MHz Credential Compatibility</b>  | Secure Identity Object™ (SIO) on iCLASS® Seos®, iCLASS SE®/SR iCLASS® Access Control Application (standard iCLASS cards) ISO 14443A (MIFARE) CSN, ISO 14443B CSN<br>Secure Identity Object (SIO) on NFC-enabled devices using Host-Based Card Emulation, Template on Card with Seos  |
| <b>2.4 GHz Credential Compatibility</b>  | Secure Identity Object (SIO) on Mobile IDs (Bluetooth Smart)   |
| <b>Typical Contactless Read Range<sup>1</sup> - Single Technology ID-1 Cards</b> |  |
| <b>iCLASS® Seos™</b>   | 1.0" (3 cm)  |
| <b>iCLASS®</b>   | 2.0" (5 cm)  |
| <b>Mifare® Classic , Mifare Plus</b>   | 3.0" (8 cm)  |
| <b>Mifare DESFire® (EV1, EV2)</b>  | 1.5" (4 cm)  |
| <b>Typical Mobile ID Read Range using Bluetooth &amp; Seos<sup>1</sup></b>       |  |
| <b>Twist and Go</b>  | 6.6 ft (2 m)   |
| <b>Tap</b>   | 5.9" (15 cm)   |
| <b>Hardware</b>  |  |
| <b>Mounting</b>  | Mullion Size; mount on door mullion or any flat surface  |
| <b>Color</b>   | Black Body; Silver Mounting Bracket  |
| <b>Dimensions (width x length x depth)</b>                                       | 1.97" x 8.03" x 2.17" (5.0 cm x 20.4 cm x 5.5 cm)  |
| <b>Product Weight</b>  | 13.04oz (0.38kg)   |
| <b>Operating Voltage Range</b>   | 12 VDC (9-14 VDC)  |
| <b>Current Draw - Normal Standby Current<sup>2</sup></b>                         | 800mA  |
| <b>Current Draw - Maximum Average<sup>3</sup></b>                                | 1.5A @12 VDC   |
| <b>Current Draw - Peak<sup>4</sup></b>   | 2A @ 12 VDC  |
| <b>Supervised Inputs Power (MAX)</b>   | 0.025W (5mA sink, 5V nominal) 0 to +5 VDC  |
| <b>Operating Temperature</b>   | -4° F to 153° F (-20° C to 66° C)  |
| <b>Operating Humidity</b>  | 0% to 95% relative humidity non-condensing   |
| <b>Storage Temperature</b>   | -40° F to 194° F (-40° C to 90° C)   |
| <b>Environmental Rating</b>  | IP67 Indoor/Outdoor and IK09 Impact Ratings  |
| <b>Fingerprint Biometric Sensor Type</b>   | Optical (Multispectral Imaging)  |
| <b>Device Capacity</b>   |  |
| <b>Transaction Event Logs</b>  | 1,000,0000   |
| <b>Max number of cardholders</b>   | 250,000  |
| <b>Max number of users</b>   | 5,000 (1:N Searching Identification)   |
| <b>Biometric Functions</b>   |  |
| <b>Template output format</b>  | 1:1: ANSI 378<br>1:N: Proprietary (ANSI 378+ format)   |
| <b>Verify (1:1) match score input</b>  | ANSI 378 template  |
| <b>Identify (1:N) search score input</b>   | Proprietary template (ANSI 378+ format)  |
| <b>Latent and liveness detection</b>   | Yes (multispectral imaging)  |
| <b>Language Support<sup>5</sup></b>  | English, French, German, Spanish (International), Russian, Portuguese (Brazilian), Italian, Chinese (Simplified), Japanese, Korean, Arabic   |
| <b>Communications</b>  | Ethernet (10/100), Wiegand, Open Supervised Device Protocol (OSDP) via RS485 (OSDP BIOREAD & BIOMATCH command and pivCLASS Embedded Authentication - NOT SUPPORTED)  |
| <b>Panel Connection</b>  | Pigtail  |
| <b>GPIO</b>  | 1 TTL Input/Output (Selectable), 1 Supervised Input/ TTL Output (Selectable)   |
| <b>Relay Contact Rating (Dry Output)</b>   | 1A @ 30VDC (MAX Amperage that is UL Certified)   |
| <b>Certifications</b>  | UL294/cUL (US), FCC (US), IC (Canada), CE (EU), RCM (Australia, New Zealand), BIS & WPC (India), Anatel (Brazil) NOM & IFT (Mexico), NCC (Taiwan), IDA (Singapore), MIC (Japan), SRRC (China), RoHS III, and additional regions.<br><a href="http://www.hidglobal.com/certifications">www.hidglobal.com/certifications</a> |
| <b>Crypto Processor Hardware Common Criteria Rating</b>                          | EAL 4+   |
| <b>Patents</b>   | <a href="http://www.hidglobal.com/patents">www.hidglobal.com/patents</a>   |
| <b>Housing Material</b>  | UL94 Polycarbonate   |
| <b>Warranty</b>  | Warranted against defects in materials and workmanship for 18 months (see complete warranty policy for details)  |

- 1 Read range listed is statistical mean rounded to nearest whole centimeter. HID Global testing occurs in open air. Some environmental conditions, including metallic mounting surface can significantly degrade read range and performance; plastic or ferrite spacers are recommended to improve performance on metallic mounting surfaces. BLE range is adjustable, typically 2 meters.
- 2 Standby AVG - RMS current draw without a card in the RF field.
- 3 Maximum AVG - RMS current draw during continuous card reads. Not evaluated by UL.
- 4 Peak - highest instantaneous current draw during RF communication.
- 5 Refers to languages supported by "HID Biometric Manager", software utility tool for biometric enrollment and device configuration.



hidglobal.com

North America: +1 512 776 9000

Toll Free: 1 800 237 7769

Europe, Middle East, Africa: +44 1440 714 850

Asia Pacific: +852 3160 9800

Latin America: +52 55 9171 1108

© 2020-2021 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick Logo, the Chain Design, iCLASS SE and Lumidigm are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.