

### 3.5W Explosion Proof Smoke Detector - C1D1 - 120V AC - Ceiling Mount - IP44 - (4) 3/4" NPT EXP-SD-SFC-120V-V1

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



#### EXP-SD-SFC-120V-V1 Explosion Proof Smoke Detector

Listing: United States, Canada, EU, International

Type: Explosion Proof Smoke Alarm

Dimensions: 5" x 13.6"

Weight: 7.85 lbs

Voltage: 120V AC

Watts: 3.5W (Maximum)

Smoke Alarm Relay: Form C, 5A @ 30V DC - NO/NC Contacts + Normally De-energized Operation

Trouble Relay: Form A, 5A @ 30V DC - NO Contacts + Normally Energized Operation Test Switch/LED Indicator

Auxiliary Relay: Form C, 5A @ 30V DC - NO/NC Contacts + Normally De-energized Operation

Current Output: 0-20 mA ( $\pm 0.3$  mA) DC w/ Max Loop Resistance of 300 ohms from 12-17.9V DC

Operating Temperature Range:  $-20^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$

Humidity Range: 5 to 95% RH

Materials: Polycarbonate/ABS (Detector), Copper-free Aluminum (Junction Box)

Mounting: Ceiling Mount

Terminals/Wire Size: 14-18 AWG Rated (Shielded Stranded Copper Wire)

Hubs: (4) 3/4" NPT

Color: Red/White

#### Ratings/Features

Class I, Division 1 Groups B,C,D

Class I, Division 2 Groups A,B,C,D

Class I, Zone 1

AEX db ia IIC T4 Gb

IECEX FMG15.0014X

Tamb  $-20^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$

IP44

#### Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com)

**The EXP-SD-SFC-120V-V1 from Larson Electronics is an Explosion Proof Smoke Detector that is designed for combustible facilities. This 120V AC smoke alarm contains three sets of relays, a magnetic test switch and an LED indicator. Constructed of polycarbonate/ABS and copper-free aluminum, the IP44 rated unit is compatible with ceiling mounting applications.**

The EXP-SD-SFC-120V-V1 is a cutting-edge smoke detector for use in flammable work sites. Equipped with a magnetic test switch and an LED indicator, this low voltage unit operates on 120V AC. A low output range of 0-20 mA ensures seamless integration with Distributed Control Systems (DCS). The LED indicator flashes once every four seconds on standby mode. When the alarm is activated, the LED light is steady on. The unit will automatically deactivate the alarm after 10 seconds, when smoke falls below the threshold for detection.

The explosion proof device contains three sets of relays (total of 8 relay outputs): Smoke Alarm, Trouble and Auxiliary. The 5-amp smoke alarm relay is Form C with normally open and normally closed contacts, as well as normally de-energized

operation. The 5-amp trouble relay is Form A with normally open contacts and normally energized operation. The 5-amp auxiliary relay is Form C with normally open and normally closed contacts, as well as normally de-energized operation. The explosion proof smoke alarm is constructed of polycarbonate/ABS, with a copper-free aluminum junction box. When mounted to ceilings, the unit is IP44 rated. This explosion proof detector features a T4 temperature rating and is ATEX/IECEX rated.

**Wiring/Hubs:** The EXP-SD-SFC-120V-V1 contains terminals that accept 14-18 AWG shielded stranded copper wire during installation. Operators may access a total of four, 3/4" NPT hubs to complete electrical connections.

**Mounting:** Operators can mount the explosion proof device on ceilings.

**Applications:** Combustible storage buildings, hazardous locations, chemical manufacturing, petroleum refineries, battery rooms, turbine enclosures, industrial operations and more.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com) for more information about our custom options tailored to meet your specific industry needs.

---





---

## Frequently Asked Questions (FAQ)

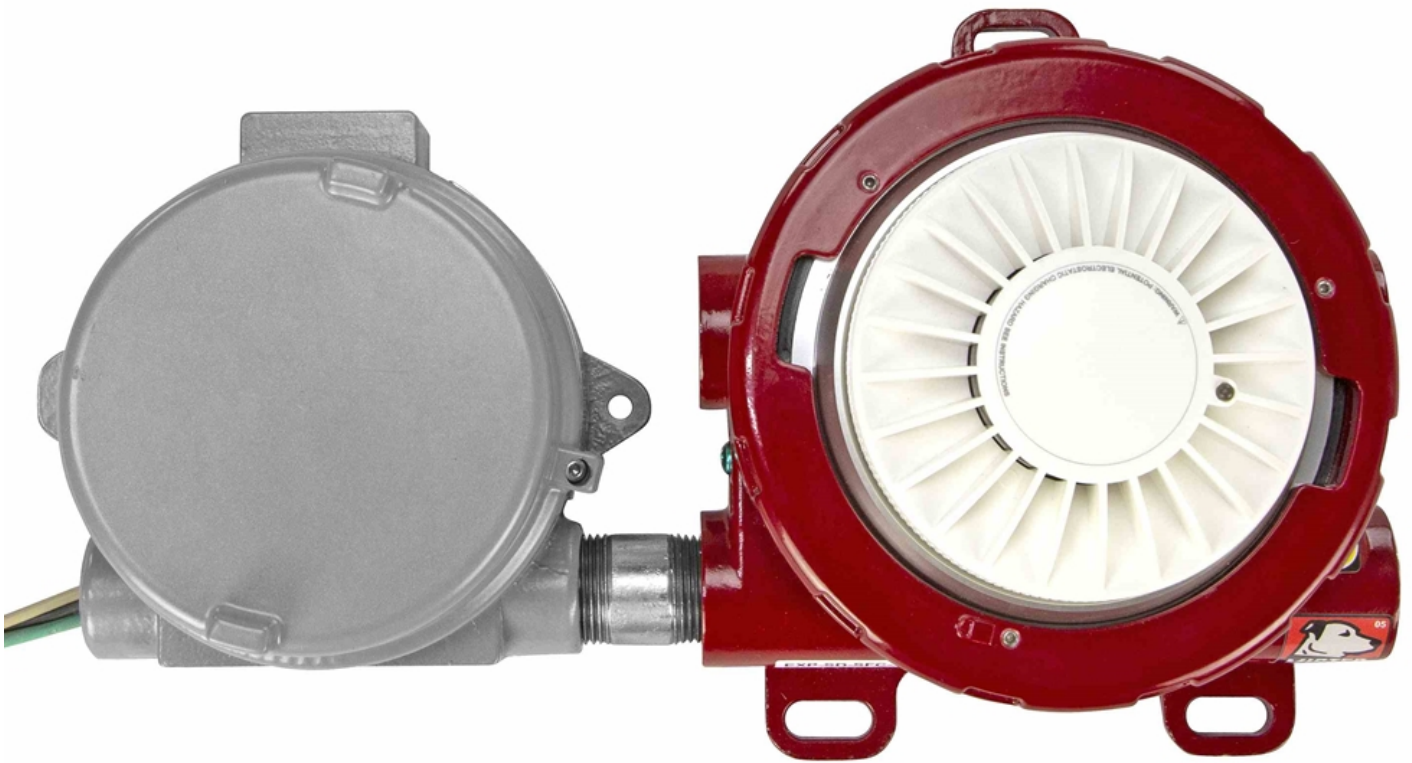



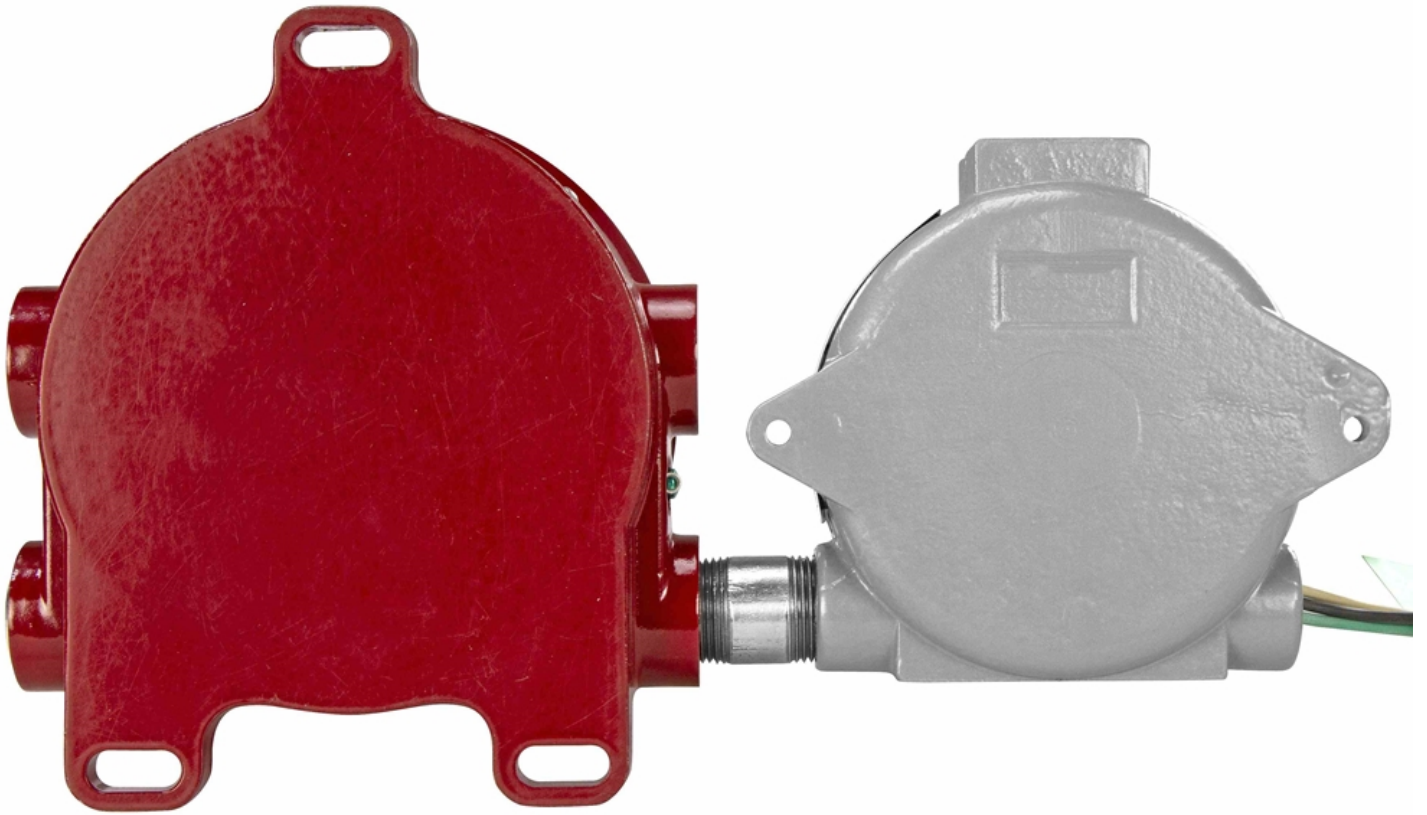

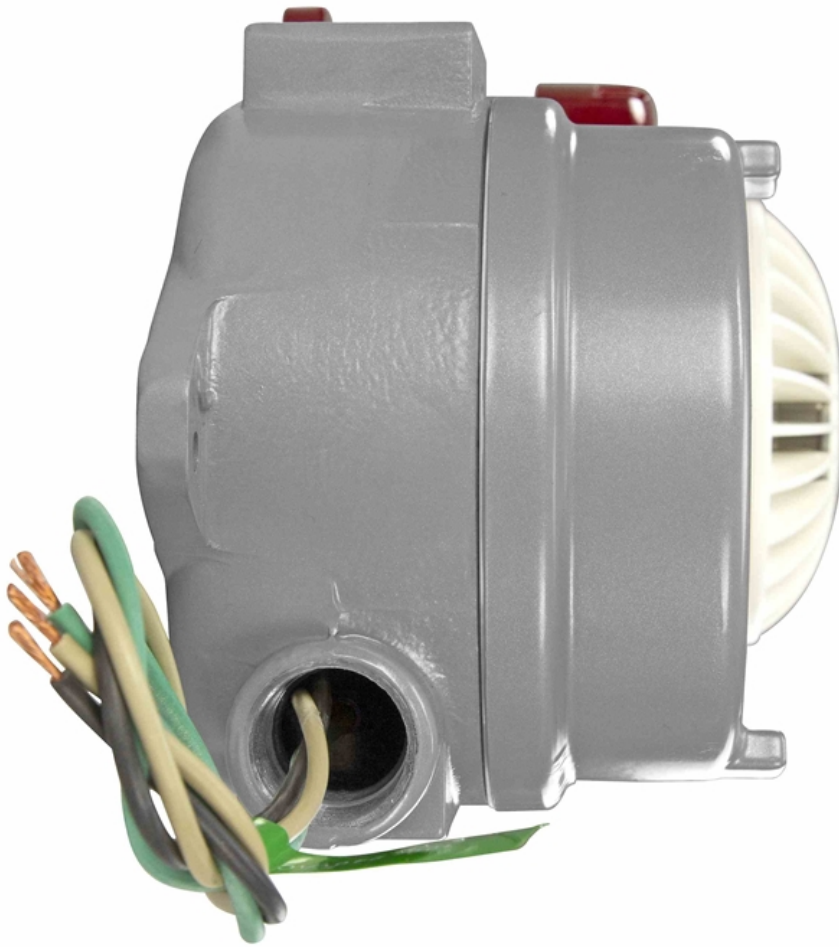

Links (Click on the below items to view):

- [Operations Manual](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [Video1](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)