

**LED**



**SUNLIGHT READABLE**



**17RTCSR**

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

**OVERVIEW**

ORION Images Sunlight readable LED monitors offer enhanced ultra-high brightness LED color display for high ambient light applications. The advantage of Transflective technology is that there is no extra heat generation lower power consumption, contrast and brightness is naturally brighter to help preserve the life of the back light. They are designed for use in applications such as industrial machinery, kiosk, ATM machines and and order confirmation system.

**FEATURES**

- Metal Chassis
- 1000 Nit (Indoor) / 1500 Nit (Outdoor) Brightness
- Sunlight Readable Ultra Bright LED with Transflective Technology
- 3D Comb Filter, Deinterlace, Transflective Enhancement, Multi-Language
- BNC Video 2 In / 2 Out, S-Video 1 In / 1 Out, DVI-D 1 In, HDMI 2 In, VGA 1 In, Component 1 In, Audio 3 In, PC Stereo 1 In
- Built-In Speakers
- Wall and Rack Mount Kit




### SPECIFICATIONS

17RTCSR	
<b>Display</b>	
Screen Size	17 Inch
Max. Resolution	1280 x 1024 @ 75Hz
Pixel Pitch	0.264 x 0.264mm
Brightness	1000cd/m <sup>2</sup> (Indoor) / 1500cd/m <sup>2</sup> (Outdoor)
Contrast Ratio	1000 : 1
Aspect Ratio	5 : 4
Viewing Angle (H/V)	170° / 160°
Display Color	16.2 Million
Response Time	< 5ms
Video System	NTSC / PAL
<b>Interface</b>	
Video In / Out (BNC Type)	2 In / 2 Out
DVI-D In / HDMI In	1 In / 2 In
S-Video In / Out	1 In / 1 Out
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	3 In
Component In	1 In
PC Stereo In	1 In
<b>Transmitter</b>	
Remote Control	Yes
<b>Audio</b>	
Built-in Speakers	Yes (1W x 2)
<b>Features</b>	
Filter Type	3D Comb Filter
Deinterlacing	Yes
Noise Reduction Control (NR)	Yes
Multi Display Function	PIP / PBP
Trigger Source Switching	Yes (NO / NC)
Auto Source Sequencing	Yes
LCD Protection Glass	Yes
Transflective Enhancement	Yes
Multi Language	English, Spanish, French, German, Italian
<b>General</b>	
Outline Dimension	14.9" x 13.2" x 3.4"
Net Weight	5.94Kg (13.10 lbs)
Material / Color	Electronic galvanized iron / Black
Desk Top Stand	Tilt Back
Part / Labor	3year / 3year
Consumption: < On	< 40W
	AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC12V
Operating Temperature	0 ~ 40° C / 32 ~ 104° F
Storage Temperature	-20 ~ 60° C / -4 ~ 140° F
<b>Mounts</b>	
VESA™ Mount Size	100 x 100mm
Wall	WB-5, WB-10, WB-30, WB-31
Ceiling	CMK-01
Rack	RMK-08

\*Design and specifications are subject to change without notice


### INPUT INTERFACE

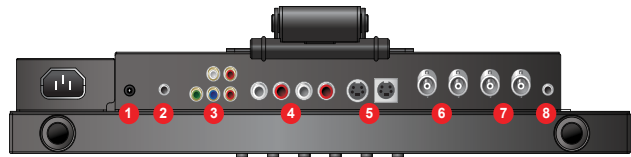


- 1 DC 12V In
- 2 Trigger In
- 3 Component In
- 4 Audio In (RCA Type)
- 5 S-Video In / Out
- 6 Video1 In / Out
- 7 Video2 In / Out
- 8 PC Stereo In
- 9 RGB In (15pin D-Sub)
- 10 DVI-D In
- 11 HDMI In (1, 2)



### DIMENSIONS

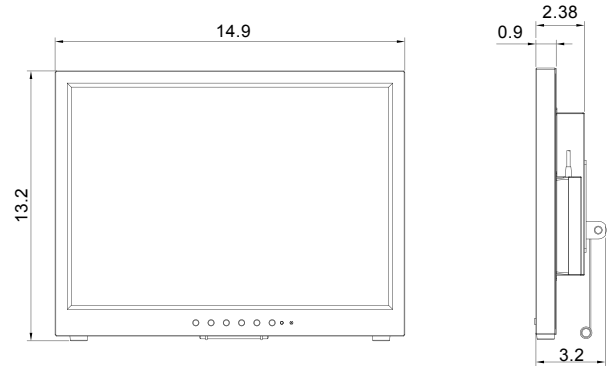

### OPTIONAL MOUNTS

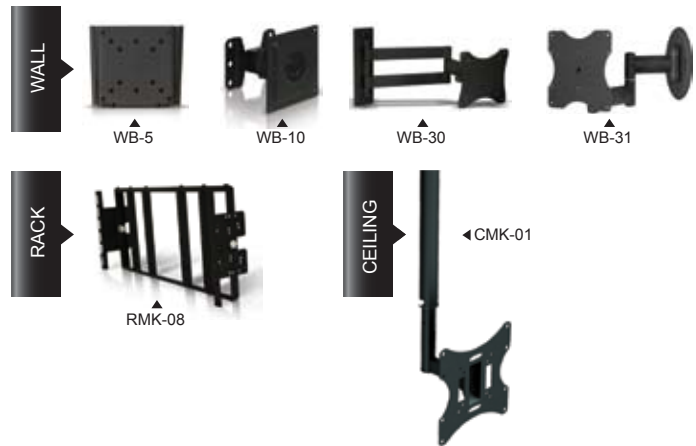

### How does this technology work?

Transflective LCD modules hold both transmissive and reflective properties; the method of image display depends upon the conditions of the ambient environment. The display uses a backlight with a transmissive property in dark environments, and uses external light with a reflective property in bright environments.

### Application

- » Public Information Display (Bus, Railway, Airport)
- » Digital Signage (Advertisement)
- » ATM, Outdoor Kiosk (Bank, Shopping Mall, Theater)
- » Gas Pump (Gas Station)



### APPLICATION OF SUNLIGHT READABLE VIDEO WALLS

